


Last information update: July 2025

**Product configuration: N123**

N123: wall-washer luminaire - Ø 96 mm - neutral white - frame

**Product code**

N123: wall-washer luminaire - Ø 96 mm - neutral white - frame

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in neutral white colour tone 4000K.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

0.65

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

**Notes**


TPb rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	821	Colour temperature [K]:	4000
W system:	11.5	MacAdam Step:	2
lm source:	1550	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	8.9	Lamp code:	LED
Luminous efficiency (lm/W, real value):	71.4	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	53	Control:	DALI-2
CRI (minimum):	80		

Polar

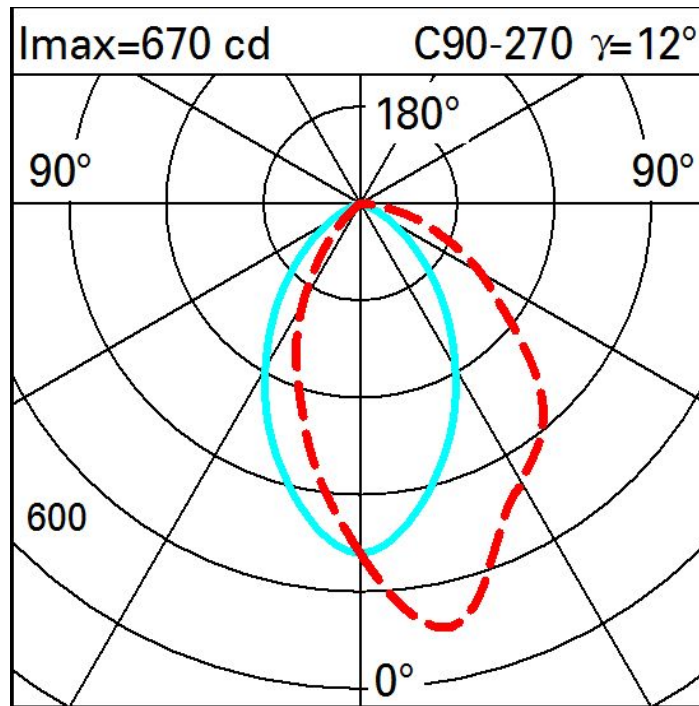

Illuminances

Lux												Wall distance = 1m	
3													
	0.3	0.9	3	16	63	120	63	16	3	0.9	0.3		
2	1	4	12	34	87	138	87	34	12	4	1		
	3	6	15	35	67	86	67	35	15	6	3		
1	4	7	14	27	41	49	41	27	14	7	4		
	4	7	12	19	26	31	26	19	12	7	4		
0													
	m	-2	-1	0	1	2	3						