


Last information update: February 2025

**Product configuration: Q912**

Q912: Linear module LB XS for 48V track - GL Pro 5 cells



**Product code**

Q912: Linear module LB XS for 48V track - GL Pro 5 cells

**Technical description**

Fixed linear module with 5 optic elements complete with adapter for installation on a 48V low voltage track. The adapter made of a thermoplastic material includes the DC/DC driver circuit with a DALI dimmable function. Integrated «power line» technology allows each light module on the track to be adjusted separately. Fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Extruded aluminium main body and technical dissipation unit. A rapid tool-free system for connecting the adapter electrically and mechanically to the track.

**Installation**

Mechanical fastening with adapter on track.

**Colour**

White (01) | Black/white (F2)

**Weight (Kg)**

0.16


**Mounting**

Low voltage track

**Wiring**

Integrated DC/DC LED driver in adapter - direct connection on 48V track. Track power supply unit to be ordered separately.


Complies with EN60598-1 and pertinent regulations



**Technical data**

Im system:	656	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W system:	11.4	Lamp code:	LED
Im source:	950	Number of lamps for optical assembly:	1
W source:	10	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	57.5	Number of optical assemblies:	1
Im in emergency mode:	-	LED current [mA]:	700
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	69	Minimum dimming %:	5
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000	Control:	DALI
MacAdam Step:	2		


**Polar**

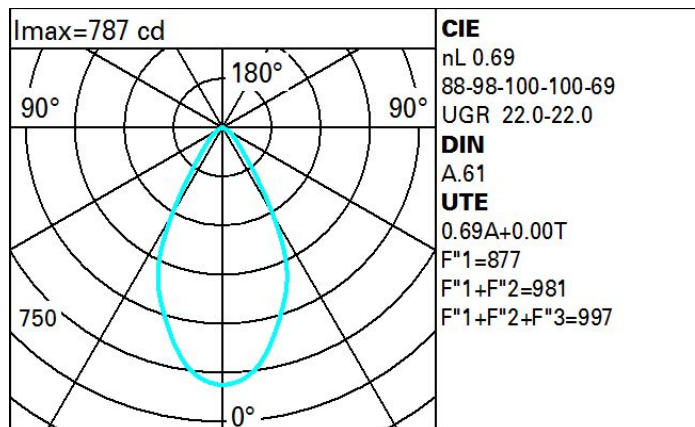

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

Luminance curve limit

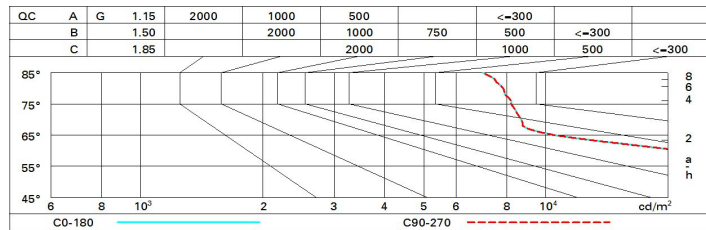

UGR diagram

Corrected UGR values (at 950 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	22.1	22.8	22.4	23.0	23.3	22.1	22.8	22.4	23.0	23.3
	3H	22.0	22.7	22.4	23.0	23.3	22.1	22.7	22.4	23.0	23.3
	4H	22.0	22.6	22.4	22.9	23.2	22.0	22.6	22.4	22.9	23.2
	6H	22.0	22.6	22.4	22.9	23.2	22.0	22.5	22.3	22.8	23.2
	8H	22.0	22.5	22.4	22.9	23.2	21.9	22.5	22.3	22.8	23.1
12H	22.0	22.5	22.4	22.8	23.2	21.9	22.4	22.3	22.7	23.1	
4H	2H	22.0	22.6	22.4	22.9	23.2	22.0	22.6	22.4	22.9	23.2
	3H	22.0	22.5	22.4	22.9	23.2	22.1	22.6	22.4	22.9	23.3
	4H	22.0	22.5	22.4	22.8	23.2	22.0	22.5	22.4	22.8	23.2
	6H	22.0	22.4	22.5	22.8	23.3	22.0	22.4	22.4	22.8	23.2
	8H	22.0	22.4	22.5	22.8	23.3	22.0	22.3	22.4	22.7	23.2
12H	22.0	22.3	22.5	22.8	23.2	21.9	22.2	22.4	22.7	23.1	
8H	4H	22.0	22.3	22.4	22.7	23.2	22.0	22.4	22.5	22.8	23.3
	6H	22.0	22.3	22.5	22.7	23.2	22.0	22.3	22.5	22.8	23.2
	8H	22.0	22.3	22.5	22.7	23.2	22.0	22.3	22.5	22.7	23.2
	12H	22.0	22.2	22.5	22.7	23.2	22.0	22.2	22.5	22.7	23.2
12H	4H	21.9	22.2	22.4	22.7	23.1	22.0	22.3	22.5	22.8	23.2
	6H	22.0	22.2	22.4	22.7	23.2	22.0	22.3	22.5	22.7	23.2
	8H	22.0	22.2	22.5	22.7	23.2	22.0	22.2	22.5	22.7	23.2
Variations with the observer position at spacing:											
S =	1.0H	2.4 / -2.2					2.4 / -2.2				
	1.5H	4.5 / -4.7					4.5 / -4.7				
	2.0H	6.3 / -6.0					6.3 / -6.0				