


Isolux

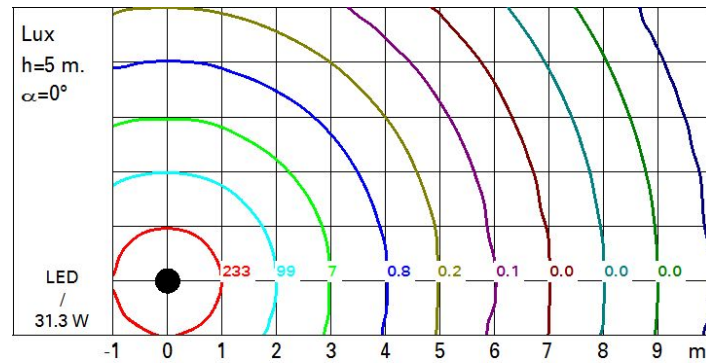

UGR-Diagramm

Corrected UGR values (at 3880 lm bare lamp luminous flux)												
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
		viewed crosswise					viewed endwise					
2H	2H	4.3	4.9	4.6	5.1	5.3	4.3	4.9	4.6	5.1	5.3	
	3H	4.2	4.7	4.5	5.0	5.3	4.2	4.7	4.5	5.0	5.3	
	4H	4.2	4.6	4.5	4.9	5.2	4.1	4.6	4.5	4.9	5.2	
	6H	4.1	4.5	4.4	4.8	5.2	4.1	4.5	4.4	4.8	5.1	
	8H	4.0	4.5	4.4	4.8	5.1	4.0	4.5	4.4	4.8	5.1	
	12H	4.0	4.4	4.4	4.8	5.1	4.0	4.4	4.4	4.7	5.1	
4H	2H	4.1	4.6	4.5	4.9	5.2	4.2	4.6	4.5	4.9	5.2	
	3H	4.0	4.4	4.4	4.8	5.1	4.0	4.5	4.4	4.8	5.1	
	4H	4.0	4.3	4.4	4.7	5.1	4.0	4.3	4.4	4.7	5.1	
	6H	3.9	4.2	4.3	4.6	5.0	3.9	4.2	4.3	4.6	5.0	
	8H	3.9	4.1	4.3	4.5	5.0	3.8	4.1	4.3	4.5	5.0	
	12H	3.8	4.1	4.3	4.5	4.9	3.8	4.1	4.3	4.5	4.9	
8H	4H	3.8	4.1	4.3	4.5	5.0	3.9	4.1	4.3	4.5	5.0	
	6H	3.8	4.0	4.2	4.4	4.9	3.8	4.0	4.2	4.4	4.9	
	8H	3.7	3.9	4.2	4.4	4.9	3.7	3.9	4.2	4.4	4.9	
	12H	3.7	3.8	4.2	4.3	4.8	3.7	3.8	4.2	4.3	4.8	
12H	4H	3.8	4.1	4.3	4.5	4.9	3.8	4.1	4.3	4.5	4.9	
	6H	3.7	3.9	4.2	4.4	4.9	3.7	3.9	4.2	4.4	4.9	
	8H	3.7	3.8	4.2	4.3	4.8	3.7	3.8	4.2	4.3	4.8	
Variations with the observer position at spacing:												
S =		1.0H	5.5 / -7.5				5.5 / -7.5					
		1.5H	8.3 / -9.6				8.3 / -9.6					
		2.0H	10.3 / -10.8				10.3 / -10.8					