


Last information update: March 2025

**Product configuration: R594**

R594: Recessed frame - LED - Neutral white - Incorporated DALI dimmable power supply - Wall washer optic



**Product code**


R594: Recessed frame - LED - Neutral white - Incorporated DALI dimmable power supply - Wall washer optic

**Technical description**

Miniaturized recessed rectangular luminaire with LEDs. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Asymmetrical optic system designed to achieve an effective wall washer distribution. Flux enhancer - superpure aluminium reflector - screen in PMMA with ribbed texture; a special film in acrylic material, combined with the screen, allow for a uniform and effective light emission on the wall. Black polycarbonate internal perimeter frame. Supplied with DALI dimmable control gear connected to the luminaire. Warm white LED.

**Installation**

recessed with steel springs for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal) - preparation slot 37 x 406. To light the wall correctly check the installation distances and centre-to-centre distances on the instructions sheet.



**Colour**

Black / Black (43) | Black / White (47) | Grey / Black (74)\*

**Weight (Kg)**

0.86

\* Colours on request

**Mounting**

wall recessed|ceiling recessed

**Wiring**

on power box: screw connections

**Notes**

dimming function with pushbutton (TOUCH DIM/PUSH): for this option consult the instructions included in the package. Accessory anti-glare screen available code MPX9.


Complies with EN60598-1 and pertinent regulations



**Technical data**

lm system:	1280	CRI (typical):	92
W system:	33.5	Colour temperature [K]:	3000
lm source:	3200	MacAdam Step:	3
W source:	29	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	38.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	40	Number of optical assemblies:	1
CRI (minimum):	90	Control:	DALI-2

Polar

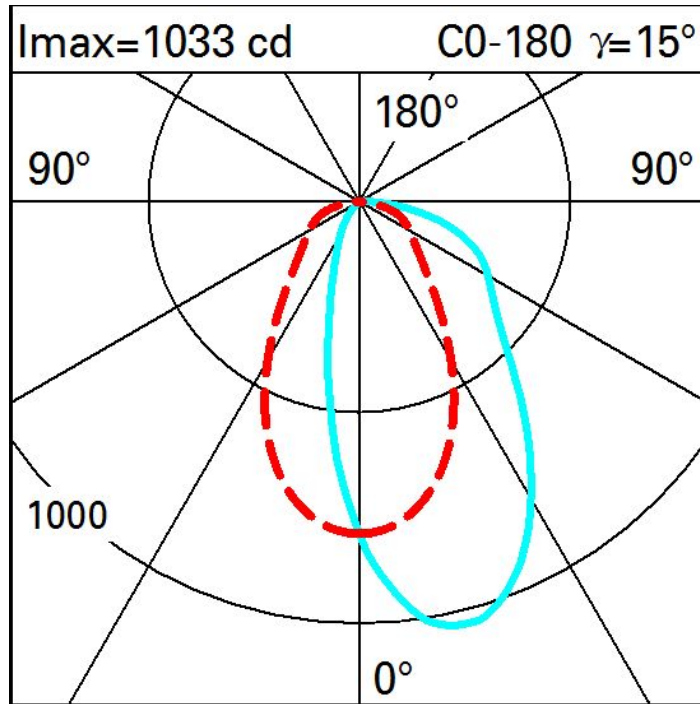

Illuminances

Lux		Wall distance = 1m													
3															
		3	7	16	44	132	237	132	44	16	7	3			
2		6	11	23	55	126	178	126	55	23	11	6			
		6	12	24	55	102	129	102	55	24	12	6			
1		6	11	23	45	70	84	70	45	23	11	6			
		6	11	20	33	46	52	46	33	20	11	6			
0															
	m	-2	-1	0	1	2	3								