

## Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

### Product configuration: PI10

PI10: Frame adjustable 2 x 15-cell recessed luminaire - LED DALI dimmable power supply



### Product code

PI10: Frame adjustable 2 x 15-cell recessed luminaire - LED DALI dimmable power supply

### Technical description

Recessed rectangular luminaire with LEDs. Shaped steel sheet structural compartment with outer rim. The two linear elements with 15 lighting cells, in die-cast aluminium and independently adjustable, can be used to direct the emission with a tilting adjustability of +/- 20°. Metallised thermoplastic high definition optics, integrated in a rear position in the black anti-glare screen; the structure of the optical system prevents a pinpoint effect, allowing precise, circular light distribution and controlled glare emission. Supplied with DALI dimmable power supply connected to the luminaire.

### Installation

recessed with mechanical blocking system for false ceilings from 1 to 25 mm; can be installed on ceilings and walls (vertical + horizontal)

### Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | Grey / Black (74)\* | White / burnished chrome (E7)\*

### Weight (Kg)

1.65

\* Colours on request

### Mounting

wall recessed|ceiling recessed

### Wiring

on power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations



### Technical data

lm system:	4018	CRI (minimum):	90
W system:	48	Colour temperature [K]:	2700
lm source:	2450	MacAdam Step:	3
W source:	21	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	83.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	82	Number of optical assemblies:	2
Beam angle [°]:	42°	Control:	DALI-2


### Polar

 Imax=3898 cd 90° 180° 90° 4000 0° α = 42°	<b>CIE</b> nL 0.82 100-100-100-100-82 UGR 14.6-14.6 <b>DIN</b> A.61 <b>UTE</b> 0.82A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m² at 65° UGR<16   L<1500 cd/mq @65°				<b>Lux</b>			
	h	d	Em	Emax				
	2	1.5	782	974				
	4	3.1	195	244				
	6	4.6	87	108				
	8	6.1	49	61				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	68	65	70	67	67	64	78
1.0	77	74	71	70	73	71	70	68	83
1.5	81	78	76	75	78	76	75	73	89
2.0	84	82	80	79	81	79	78	76	93
2.5	85	84	83	82	83	82	81	78	96
3.0	86	85	84	84	84	83	82	80	98
4.0	87	86	86	85	85	85	83	81	99
5.0	88	87	87	87	86	85	84	82	100

# Luminance curve limit

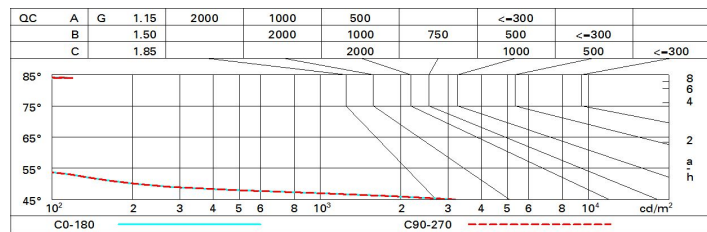

# UGR diagram

Corrected UGR values (at 2450 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	15.1	15.7	15.4	15.9	16.1	15.1	15.7	15.4	15.9	16.1
	3H	15.0	15.5	15.3	15.7	16.0	15.0	15.5	15.3	15.7	16.0
	4H	14.9	15.4	15.3	15.7	16.0	14.9	15.4	15.3	15.7	16.0
	6H	14.9	15.3	15.2	15.6	15.9	14.9	15.3	15.2	15.6	15.9
	8H	14.8	15.2	15.2	15.5	15.9	14.8	15.2	15.2	15.5	15.9
	12H	14.8	15.2	15.2	15.5	15.8	14.8	15.2	15.2	15.5	15.8
4H	2H	14.9	15.4	15.3	15.7	16.0	14.9	15.4	15.3	15.7	16.0
	3H	14.8	15.2	15.2	15.5	15.8	14.8	15.2	15.2	15.5	15.8
	4H	14.7	15.0	15.1	15.4	15.8	14.7	15.0	15.1	15.4	15.8
	6H	14.6	14.9	15.0	15.3	15.7	14.6	14.9	15.0	15.3	15.7
	8H	14.6	14.8	15.0	15.2	15.7	14.6	14.8	15.0	15.2	15.7
	12H	14.5	14.8	15.0	15.2	15.6	14.5	14.8	15.0	15.2	15.6
8H	4H	14.6	14.8	15.0	15.2	15.7	14.6	14.8	15.0	15.2	15.7
	6H	14.5	14.7	14.9	15.1	15.6	14.5	14.7	14.9	15.1	15.6
	8H	14.4	14.6	14.9	15.1	15.6	14.4	14.6	14.9	15.1	15.6
	12H	14.4	14.5	14.9	15.0	15.5	14.4	14.5	14.9	15.0	15.5
12H	4H	14.5	14.8	15.0	15.2	15.6	14.5	14.8	15.0	15.2	15.6
	6H	14.4	14.6	14.9	15.1	15.6	14.4	14.6	14.9	15.1	15.6
	8H	14.4	14.5	14.9	15.0	15.5	14.4	14.5	14.9	15.0	15.5
Variations with the observer position at spacing:											
S =	1.0H	6.3 / -34.2					6.3 / -34.2				
	1.5H	9.1 / -35.8					9.1 / -35.8				
	2.0H	11.1 / -37.1					11.1 / -37.1				