

## Palco Recessed / Surface


Design Artec  
Studio

iGuzzini

Last information update: October 2024

### Product configuration: QC25

QC25: Palco linear recess 3 x Ø37 - flood - remote driver

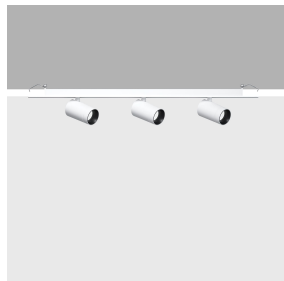

### Product code

QC25: Palco linear recess 3 x Ø37 - flood - remote driver

### Technical description

Linear luminaire for recessed installation with 3 miniaturised adjustable spotlights. Spotlight bodies with a die-cast aluminium dissipation system - cast zamak rotation units - a linear recess structure consisting of an extruded aluminium internal profile, painted steel caps and stop plate - steel wire fixing springs. The spotlight swivel joints allow the spotlight to be rotated by 360° and tilted by 90°. The set back position of the optic units guarantees a high level of visual comfort with thermoplastic high definition lenses. Ballast not included, available with separate code.

### Installation

Recessed linear base with surface stop plate - steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 00 x 000 mm. Option of installing next to linear versions so as to create a continuous line.

### Colour

White (01) | Black (04)

### Weight (Kg)

0.51

### Mounting

wall recessed|ceiling recessed

### Wiring

Output cables for connecting to power supply line.

### Notes

Technical and anti-glare accessories available.

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	1350	CRI (minimum):	90
W system:	24.3	Colour temperature [K]:	2700
Im source:	750	MacAdam Step:	2
W source:	8.1	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	55.6	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	60	Number of optical assemblies:	3
Beam angle [°]:	45°	LED current [mA]:	650


### Polar

Imax=818 cd		CIE		Lux			
90°	180°	nL 0.60	97-100-100-100-60	h	d	Em	Emax
		UGR 18.1-18.1	DIN A.61	1	0.8	639	818
		UTE 0.60A+0.00T	F*1=975	2	1.7	160	205
		F*1+F*2=999	F*1+F*2+F*3=1000	3	2.5	71	91
		CIBSE LG3 L<1500 cd/m² at 65°	UGR<19   L<1500 cd/mq @65°	4	3.3	40	51
α=45°							

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	54	51	49	47	50	48	48	46	77
1.0	56	53	51	50	53	51	51	49	81
1.5	59	57	55	54	56	55	54	53	88
2.0	61	59	58	57	59	58	57	55	92
2.5	62	61	60	59	60	59	59	57	95
3.0	63	62	61	61	61	61	60	58	97
4.0	64	63	63	62	62	62	61	59	99
5.0	64	64	63	63	63	62	61	60	100

# Luminance curve limit

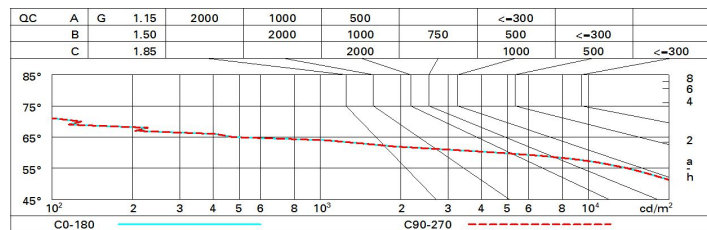

# UGR diagram

Corrected UGR values (at 750 lm bare lamp luminous flux)											
Reflect.:											
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed					viewed				
x	y	crosswise					endwise				
2H	2H	18.6	19.3	18.9	19.5	19.7	18.6	19.3	18.9	19.5	19.7
	3H	18.5	19.1	18.8	19.3	19.6	18.5	19.1	18.8	19.4	19.6
	4H	18.4	19.0	18.8	19.2	19.5	18.4	19.0	18.8	19.3	19.6
	6H	18.3	18.8	18.7	19.1	19.5	18.4	18.8	18.7	19.2	19.5
	8H	18.3	18.8	18.7	19.1	19.4	18.3	18.8	18.7	19.1	19.5
	12H	18.3	18.7	18.6	19.1	19.4	18.3	18.7	18.7	19.1	19.4
4H	2H	18.4	19.0	18.8	19.3	19.6	18.4	19.0	18.8	19.2	19.5
	3H	18.3	18.7	18.7	19.1	19.4	18.3	18.7	18.7	19.1	19.4
	4H	18.2	18.6	18.6	19.0	19.3	18.2	18.6	18.6	19.0	19.3
	6H	18.1	18.5	18.5	18.9	19.3	18.1	18.5	18.5	18.9	19.3
	8H	18.1	18.4	18.5	18.8	19.2	18.1	18.4	18.5	18.8	19.2
	12H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.5	18.7	19.2
8H	4H	18.1	18.4	18.5	18.8	19.2	18.1	18.4	18.5	18.8	19.2
	6H	18.0	18.2	18.4	18.7	19.2	18.0	18.2	18.4	18.7	19.2
	8H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
	12H	17.9	18.1	18.4	18.5	19.1	17.9	18.1	18.4	18.5	19.1
12H	4H	18.0	18.3	18.5	18.7	19.2	18.0	18.3	18.5	18.7	19.2
	6H	17.9	18.1	18.4	18.6	19.1	17.9	18.1	18.4	18.6	19.1
	8H	17.9	18.1	18.4	18.5	19.1	17.9	18.1	18.4	18.5	19.1
Variations with the observer position at spacing:											
S =		1.0H	5.2 / -8.8				5.2 / -8.8				
		1.5H	8.0 / -22.1				8.0 / -22.1				
		2.0H	10.0 / -34.7				10.0 / -34.7				