



Last information update: October 2024

Product configuration: Q860

Q860: Ceiling-mounted LB XS P square HC - 9 cells - Wide Flood beam - integrated driver



Product code

Q860: Ceiling-mounted LB XS P square HC - 9 cells - Wide Flood beam - integrated driver

Technical description

Ceiling-mounted luminaire with 9 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium body - die-cast zamak technical dissipation unit - shaped steel fixing plate. ON-OFF driver integrated in luminaire body.

Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Black/gold (44)* | White / burnished chrome (E7)* | Black/burnished chrome (F1)*

Weight (Kg)

0.66

* Colours on request

Mounting

ceiling surface

Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1536	Colour temperature [K]:	4000
W system:	17.7	MacAdam Step:	2
Im source:	1850	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	15	Voltage [Vin]:	230
Luminous efficiency (lm/W, real value):	86.8	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	83	Number of optical assemblies:	1
Beam angle [°]:	58°	Power factor:	See installation instructions
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 1kV Differential mode


Polar

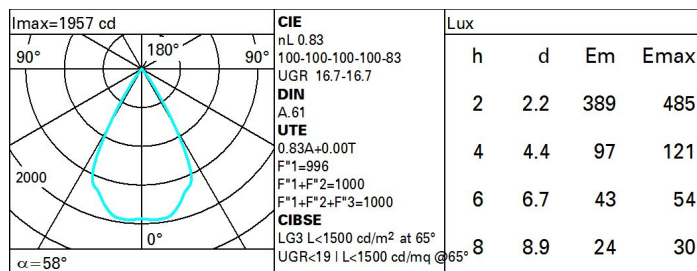

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

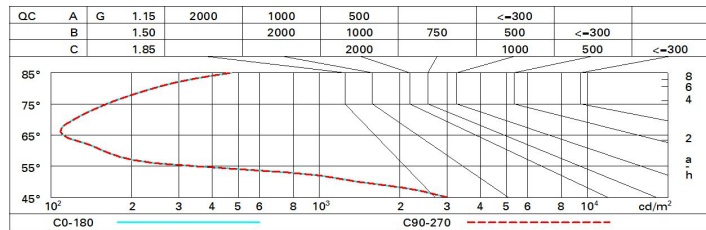

UGR diagram

Corrected UGR values (at 1850 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.3	17.9	17.5	18.1	18.3	17.3	17.9	17.5	18.1	18.3
	3H	17.1	17.7	17.4	17.9	18.2	17.1	17.7	17.4	17.9	18.2
	4H	17.1	17.5	17.4	17.8	18.1	17.1	17.5	17.4	17.8	18.1
	6H	17.0	17.4	17.3	17.7	18.1	17.0	17.4	17.3	17.7	18.1
	8H	16.9	17.4	17.3	17.7	18.0	16.9	17.4	17.3	17.7	18.0
12H	16.9	17.3	17.3	17.7	18.0	16.9	17.3	17.3	17.7	18.0	
4H	2H	17.1	17.5	17.4	17.8	18.1	17.1	17.5	17.4	17.8	18.1
	3H	16.9	17.3	17.3	17.7	18.0	16.9	17.3	17.3	17.7	18.0
	4H	16.8	17.2	17.2	17.5	17.9	16.8	17.2	17.2	17.5	17.9
	6H	16.7	17.0	17.1	17.4	17.9	16.7	17.0	17.1	17.4	17.9
	8H	16.7	17.0	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8
12H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8	
8H	4H	16.7	17.0	17.1	17.4	17.8	16.7	17.0	17.1	17.4	17.8
	6H	16.6	16.8	17.0	17.3	17.7	16.6	16.8	17.0	17.3	17.7
	8H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
	12H	16.5	16.7	17.0	17.1	17.7	16.5	16.7	17.0	17.1	17.7
12H	4H	16.6	16.9	17.1	17.3	17.8	16.6	16.9	17.1	17.3	17.8
	6H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	17.0	17.2	17.7
	8H	16.5	16.7	17.0	17.1	17.7	16.5	16.7	17.0	17.1	17.7
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				