

Last information update: March 2025

Product configuration: ET29

ET29: Spotlight with bracket - Neutral White LED - Integrated Ballast - Wall Washer optic - Ta 25°

**Product code**

ET29: Spotlight with bracket - Neutral White LED - Integrated Ballast - Wall Washer optic - Ta 25°

Technical description

Spotlight designed to use LED lamps and a Wall Washer optic. Consists of a die-cast aluminium optical assembly, bracket and box for the ballast with a clear tempered sodium-calcium safety glass cover. The luminaire is fitted with a double cable gland for pass-through wiring. The optical assembly can be adjusted on a horizontal plane at an angle between -50° / +90°. Agorà is fitted with a graduated scale and mechanical locking device for positioning. The Opti Beam Lens optical system comes complete with a Neutral White monochrome LED circuit. The electronic DALI ballast is integrated in the product and compatible with remote management systems. Compatible with programming systems via DALI terminals or an NFC system. Both indoor (diffuser glass covers, lamellar louvers and refractors for elliptical light) and outdoor accessories (cylindrical screens, visors and protective grilles) can be used. All external screws used are made of A2 stainless steel.

Installation

Floor, ceiling or wall-mounted installation.

Colour

White (01) | Black (04) | Grey (15) | Rust Brown (F5)

Weight (Kg)

9.35

Wiring

Double PG.

Complies with EN60598-1 and pertinent regulations




IK08



IP66




CE

UK
CA**Technical data**

Im system:	7750	MacAdam Step:	3
W system:	86.9	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	12500	Lamp code:	LED
W source:	78	Number of lamps for optical assembly:	1
Luminous efficiency (Im/W, real value):	89.2	ZVEI Code:	LED
Im in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Intervallo temperatura ambiente:	from -30°C to 35°C.
Light Output Ratio (L.O.R.) [%]:	62	Power factor:	See installation instructions
CRI (minimum):	80	Overvoltage protection:	10kV Common mode & 6kV Differential mode
Colour temperature [K]:	4000	Control:	DALI-2

Polar

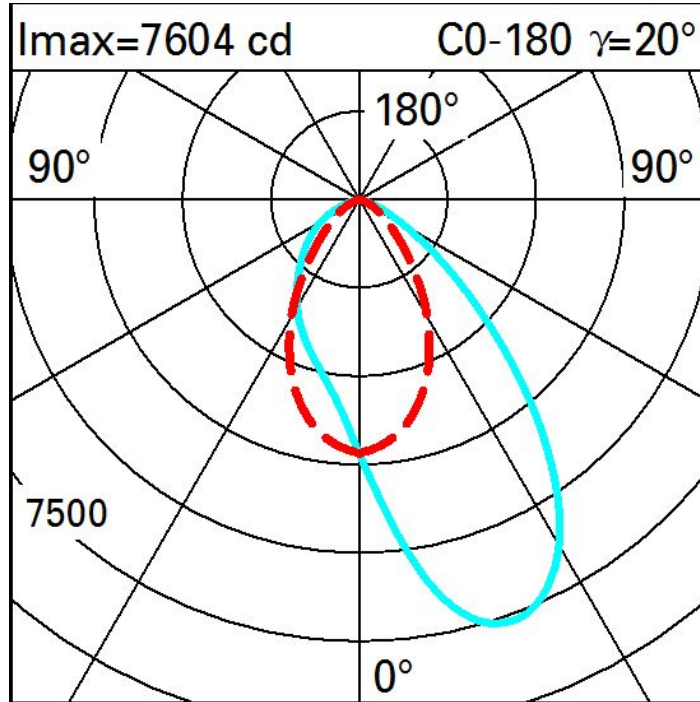

Illuminances

Lux Wall distance = 1m

3														
	0.8	4	15	51	114	145	106	41	11	2	0.6			
2	12	29	70	152	259	316	316	172	66	24	9			
	23	45	87	158	244	327	383	277	132	54	22			
1	27	46	77	127	182	249	316	269	158	80	39			
	26	42	65	94	124	168	217	214	157	95	49			
0														
	m	-2	-1	0	1	2	3							