

Coefficienti di utilizzazione

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Curva limite di luminanza

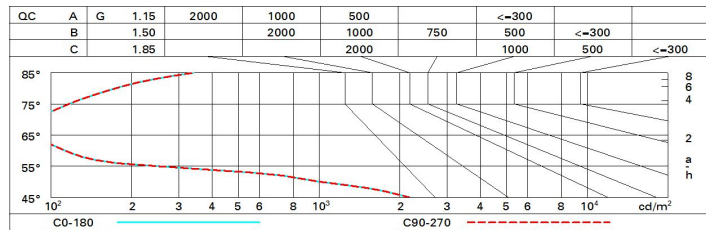


Diagramma UGR

Corrected UGR values (at 2400 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceil/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	10.2	10.6	10.4	10.8	17.1	10.2	10.6	10.4	10.8	17.1
	3H	10.0	10.4	10.3	10.7	17.0	10.0	10.4	10.3	10.7	17.0
	4H	10.0	10.3	10.3	10.6	16.9	10.0	10.3	10.3	10.6	16.9
	6H	15.9	10.2	10.2	10.5	16.9	15.9	10.2	10.2	10.5	16.9
	8H	15.8	10.2	10.2	10.5	16.8	15.8	10.2	10.2	10.5	16.8
	12H	15.8	10.1	10.2	10.5	16.8	15.8	10.1	10.2	10.5	16.8
4H	2H	10.0	10.3	10.3	10.6	16.9	10.0	10.3	10.3	10.6	16.9
	3H	15.8	10.1	10.2	10.5	16.8	15.8	10.1	10.2	10.5	16.8
	4H	15.7	10.0	10.1	10.4	16.8	15.7	10.0	10.1	10.4	16.8
	6H	15.6	15.9	10.0	10.3	16.7	15.6	15.9	10.0	10.3	16.7
	8H	15.6	15.8	10.0	10.2	16.7	15.6	15.8	10.0	10.2	16.7
	12H	15.5	15.7	10.0	10.2	16.6	15.5	15.7	10.0	10.2	16.6
8H	4H	15.6	15.8	10.0	10.2	16.7	15.6	15.8	10.0	10.2	16.7
	6H	15.5	15.7	15.9	10.1	16.6	15.5	15.7	15.9	10.1	16.6
	8H	15.4	15.6	15.9	10.1	16.6	15.4	15.6	15.9	10.1	16.6
	12H	15.4	15.5	15.9	10.0	16.5	15.4	15.5	15.9	10.0	16.5
12H	4H	15.5	15.7	10.0	10.2	16.6	15.5	15.7	10.0	10.2	16.6
	6H	15.4	15.6	15.9	10.1	16.6	15.4	15.6	15.9	10.1	16.6
	8H	15.4	15.5	15.9	10.0	16.5	15.4	15.5	15.9	10.0	16.5
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				