

Underscore X26


Design iGuzzini

iGuzzini

Last information update: June 2023

Product configuration: M858

M858: X26 surface 1000 High Flux



Product code

M858: X26 surface 1000 High Flux **Attention! Code no longer in production**

Technical description

Rigid-profile product for linear LED lighting, designed to be surface-mounted. Extruded aluminium bar structure, with diffusing opal polycarbonate linear screen. Moulded polycarbonate sides and end closing caps. Removing the end closing caps allows direct connection to the next profile thanks to a practical quick-coupling system. Version with 12 LED 24Vdc high emission module (total 12W) - white colour, warm white tone (3100K) colour rendering index - CRI 95 (recommended for use in museums). Ballast not included.

Installation

Profile snap-on fixing on accessory clips (MWJ8); the clips are fixed to the installation surface with screws and screw anchors (not included). Other fixing systems are available: adjustable arms (MWJ5 - L100; MWJ6 - L200), adjustable base (MWJ4)

Colour

Aluminium (12)

Mounting

wall surface|ceiling surface

Wiring

Constant voltage ballasts to be ordered separately: electronic 50W 24V (MWK4) - electronic 70W 24V dimmable 1-10V (MWK5). Power supply end cap with cable (MWJ9 - for connection to the ballast); intermediate power supply cap with cable (MWK0 - for connection between modules)

Notes

For fixing, connections and power supply, use the components available with a separate code.


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	421.6	CRI:	95
W system:	14.3	Colour temperature [K]:	3000
Im source:	840	Life Time LED 1:	50,000h - L70 - B20 (Ta 25°C)
W source:	13	Ballast losses [W]:	1.3
Luminous efficiency (Im/W, real value):	29.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	50	Number of optical assemblies:	1


Polar

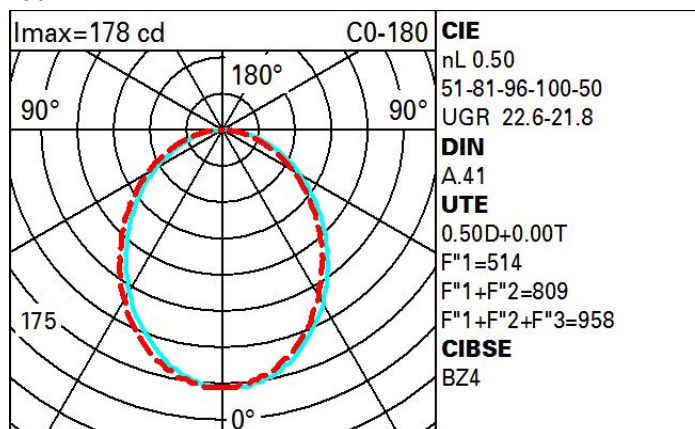

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	34	29	25	22	28	25	24	21	42
1.0	37	32	29	26	32	28	28	25	49
1.5	42	38	35	33	37	35	34	31	62
2.0	45	42	39	37	41	39	38	35	70
2.5	47	44	42	40	43	41	41	38	76
3.0	48	46	44	42	45	43	42	40	79
4.0	50	48	46	45	47	45	45	42	84
5.0	50	49	48	46	48	47	46	44	87

Luminance curve limit

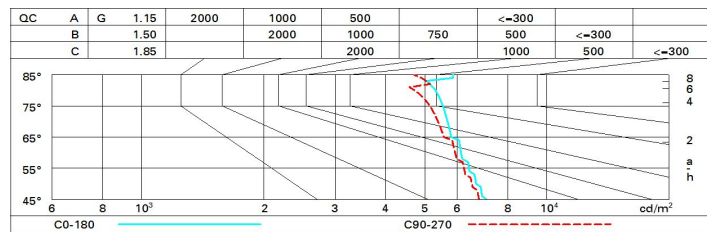

UGR diagram

Corrected UGR values (at 805 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	18.7	19.8	19.0	20.1	20.4	18.5	19.7	18.9	20.0	20.2
	3H	20.2	21.2	20.5	21.5	21.8	19.0	20.1	19.4	20.4	20.7
	4H	20.8	21.8	21.2	22.1	22.5	19.2	20.2	19.6	20.5	20.8
	6H	21.4	22.3	21.8	22.6	23.0	19.3	20.2	19.7	20.5	20.9
	8H	21.6	22.5	22.0	22.8	23.2	19.3	20.2	19.7	20.5	20.9
	12H	21.8	22.6	22.2	23.0	23.3	19.3	20.1	19.7	20.5	20.9
4H	2H	19.3	20.3	19.6	20.6	20.9	20.5	21.5	20.8	21.8	22.1
	3H	21.0	21.8	21.4	22.2	22.5	21.2	22.0	21.6	22.4	22.7
	4H	21.7	22.5	22.1	22.9	23.3	21.5	22.2	21.9	22.6	23.0
	6H	22.4	23.0	22.8	23.4	23.9	21.7	22.4	22.2	22.8	23.2
	8H	22.6	23.2	23.1	23.7	24.1	21.8	22.4	22.2	22.8	23.3
	12H	22.9	23.4	23.3	23.8	24.3	21.8	22.4	22.3	22.8	23.3
8H	4H	22.0	22.6	22.4	23.0	23.5	22.2	22.8	22.7	23.2	23.7
	6H	22.8	23.3	23.3	23.7	24.2	22.6	23.1	23.1	23.6	24.0
	8H	23.1	23.5	23.6	24.0	24.5	22.8	23.2	23.3	23.7	24.2
	12H	23.4	23.8	23.9	24.3	24.8	22.9	23.3	23.4	23.8	24.3
12H	4H	22.0	22.6	22.5	23.0	23.5	22.3	22.9	22.8	23.3	23.8
	6H	22.8	23.3	23.3	23.7	24.2	22.8	23.2	23.3	23.7	24.2
	8H	23.2	23.6	23.7	24.1	24.6	23.0	23.4	23.5	23.8	24.4
Variations with the observer position at spacing:											
S =		1.0H					0.1 / -0.1				
		1.5H					0.2 / -0.3				
		2.0H					0.5 / -0.6				