


Last information update: April 2024

**Product configuration: Q371+QH92.12**

Q371: Minimal continuous line moduleGeneral Up/Down LightL 3594

QH92.12: Plate - Up / Down - General Light - DALI - Warm LED - L 3588 - 149W 15062lm - 3000K - Aluminium

**Product code**

Q371: Minimal continuous line moduleGeneral Up/Down LightL 3594

**Technical description**

Extruded aluminium intermediate profile - Minimal (frameless) version for flush with ceiling mounting and up-down emission; this allows continuous lines to be created with other intermediate profiles and an initial profile (required). Methacrylate opal lower screen (diffused general light); screen set up for connecting several lengths by overlapping. Methacrylate diffusing screen for upper emission. Light flow split into approx. 70% down / 30% up.

**Installation**

Installation can be pendant-mounted using suitable accessories to be ordered separately; mechanical systems for connecting modules included in the package.

**Colour**

White (01) | Aluminium (12)

**Weight (Kg)**

8.45

**Mounting**

wall surface

**Wiring**

Set up to house the up-down LED modules required by the system.

**Notes**

Take care with the system configuration. To complete a continuous line correctly there must always be an initial module at the start or end of the composition.

Complies with EN60598-1 and pertinent regulations

**Product code**

QH92.12: Plate - Up / Down - General Light - DALI - Warm LED - L 3588 - 149W 15062lm - 3000K - Aluminium

**Technical description**

LED module set up for housing in initial or intermediate system profiles, ideal for particularly long light lines. Up + down emission for General Light profiles (with lower opal diffuser screen). DALI dimmable electronic control gear integrated in the luminaire. Extruded aluminium heat sink; high emission yield flux enhancer. Warm 3000K LED

**Installation**

Module insertion on profiles facilitated by a quick coupling system.

**Colour**

Indeterminate (00)

**Weight (Kg)**

4.9

**Wiring**

Quick coupling terminal block connection to simplify connections between the subsequent modules. Complete with integrated dimmable DALI control gear.

**Notes**


Important: the triple length intermediate luminous module can be used for both initial profiles - L 3594 - for stand-alone applications, and intermediate profiles - L 3594 - for continuous line applications.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	15062	Colour temperature [K]:	3000
W system:	149	MacAdam Step:	3
Im source:	22150	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	134	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	101.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	4267	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	68	Number of optical assemblies:	1
CRI (minimum):	80		

# Polar

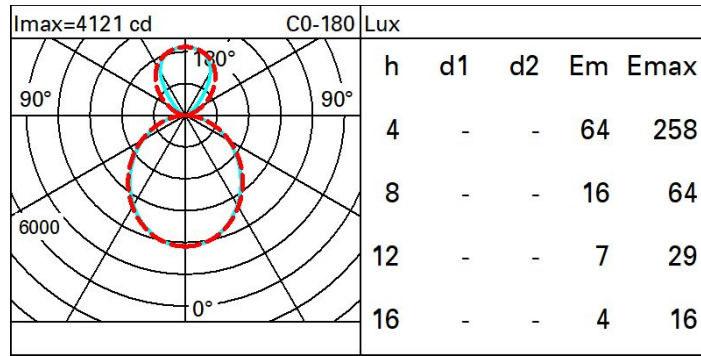

# Isolux

