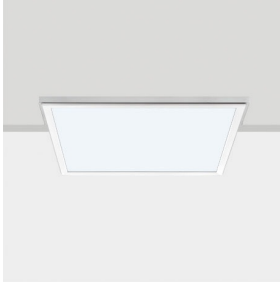


Last information update: October 2023

Product configuration: P018

P018: 600x600 - Warm White - general light - DALI

**Product code**P018: 600x600 - Warm White - general light - DALI **Attention! Code no longer in production****Technical description**

Recessed direct emission luminaire designed to use Warm White colour 3000K LEDs and be installed in 600x600 modular false ceilings or in plasterboard using a frame to be ordered as an accessory. The optical assembly is made of a thermoplastic material with a satin methacrylate diffuser screen for general light emission. Product complete with DALI components.

Installation

Recessed for installation in 600x600 modular false ceilings or in plasterboard using a frame to be ordered as an accessory.

Colour

White (01)

Mounting

ceiling recessed/wall surface

Wiring


product complete with DALI components.

Complies with EN60598-1 and pertinent regulations




IP20

IP43

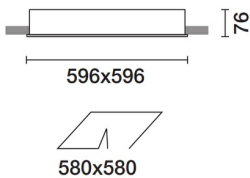On the visible part of
the product once installed**Technical data**


lm system:	3439.6	Colour temperature [K]:	3000
W system:	32.4	MacAdam Step:	3
lm source:	4300	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	27	Ballast losses [W]:	5.4
Luminous efficiency (lm/W, real value):	106.2	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	80	Number of optical assemblies:	1
CRI:	80	Control:	DALI

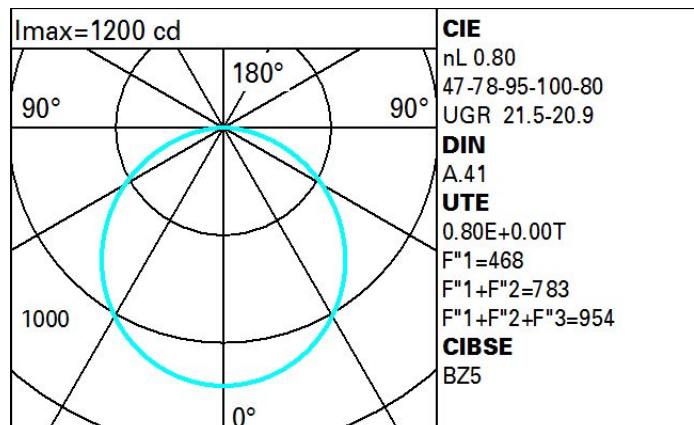Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	52	44	38	33	42	37	36	31	39
1.0	58	50	44	39	48	43	42	37	46
1.5	66	59	54	50	58	53	52	47	59
2.0	71	65	61	57	64	60	59	54	68
2.5	74	69	66	62	68	64	63	59	73
3.0	76	72	69	66	70	68	66	62	78
4.0	79	75	73	70	74	71	70	66	83
5.0	80	77	75	73	76	74	72	69	86

Luminance curve limit

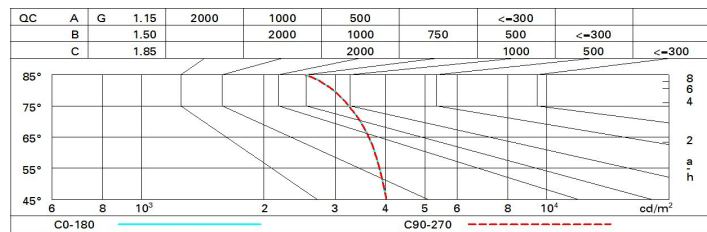

UGR diagram

Corrected UGR values (at 4300 lm bare lamp luminous flux)											
Riflect.: ceil/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	17.4	18.6	17.7	18.9	19.2	17.4	18.6	17.7	18.9	19.2
	3H	19.0	20.1	19.4	20.4	20.7	17.9	19.0	18.3	19.3	19.6
	4H	19.6	20.7	20.0	21.0	21.3	18.1	19.1	18.5	19.5	19.8
	6H	20.1	21.1	20.5	21.4	21.8	18.2	19.1	18.6	19.5	19.8
	8H	20.3	21.2	20.7	21.6	21.9	18.2	19.1	18.6	19.5	19.8
	12H	20.4	21.3	20.8	21.6	22.0	18.2	19.1	18.6	19.4	19.8
4H	2H	18.1	19.1	18.5	19.5	19.8	19.6	20.7	20.0	21.0	21.3
	3H	19.9	20.8	20.3	21.1	21.5	20.3	21.2	20.7	21.6	21.9
	4H	20.6	21.4	21.0	21.8	22.2	20.6	21.4	21.0	21.8	22.2
	6H	21.2	21.9	21.7	22.3	22.8	20.9	21.6	21.3	22.0	22.4
	8H	21.5	22.1	21.9	22.5	23.0	20.9	21.6	21.4	22.0	22.4
	12H	21.6	22.2	22.1	22.6	23.1	20.9	21.5	21.4	22.0	22.4
8H	4H	20.9	21.6	21.4	22.0	22.4	21.5	22.1	21.9	22.5	23.0
	6H	21.7	22.2	22.2	22.7	23.2	21.8	22.4	22.3	22.8	23.3
	8H	22.0	22.4	22.5	22.9	23.4	22.0	22.4	22.5	22.9	23.4
	12H	22.2	22.6	22.7	23.1	23.6	22.1	22.5	22.6	23.0	23.5
12H	4H	20.9	21.5	21.4	22.0	22.4	21.6	22.2	22.1	22.6	23.1
	6H	21.7	22.2	22.2	22.7	23.2	22.0	22.5	22.5	22.9	23.4
	8H	22.1	22.5	22.6	23.0	23.5	22.2	22.6	22.7	23.1	23.6
Variations with the observer position at spacing:											
S =	1.0H	0.1 / -0.1					0.1 / -0.1				
	1.5H	0.2 / -0.3					0.2 / -0.3				
	2.0H	0.4 / -0.5					0.4 / -0.5				