



Last information update: May 2024

Product configuration: QL34

QL34: Minimal section 5 LEDs - Wall Washer

**Product code**QL34: Minimal section 5 LEDs - Wall Washer **Attention! Code no longer in production****Technical description**

Linear recessed miniaturised luminaire for LED lamps, specialised for vertical wall lighting. The patented optic system guarantees a homogeneous and effective emission on the wall, as well as avoiding shadow zones near the ceiling. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Flux enhancer - superpure aluminium reflector - asymmetrical textured PMMA screen - black polycarbonate internal perimeter frame. Supplied with a power supply unit connected to the luminaire. High colour rendering LED.

Installation

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

Colour

Black (04)

Weight (Kg)

0.28

Mounting

wall recessed|ceiling recessed

Wiring


on power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	390	CRI (typical):	97
W system:	12	Colour temperature [K]:	4000
Im source:	1000	MacAdam Step:	3
W source:	10	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	32.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	39	Number of optical assemblies:	1
CRI (minimum):	95		

Polar

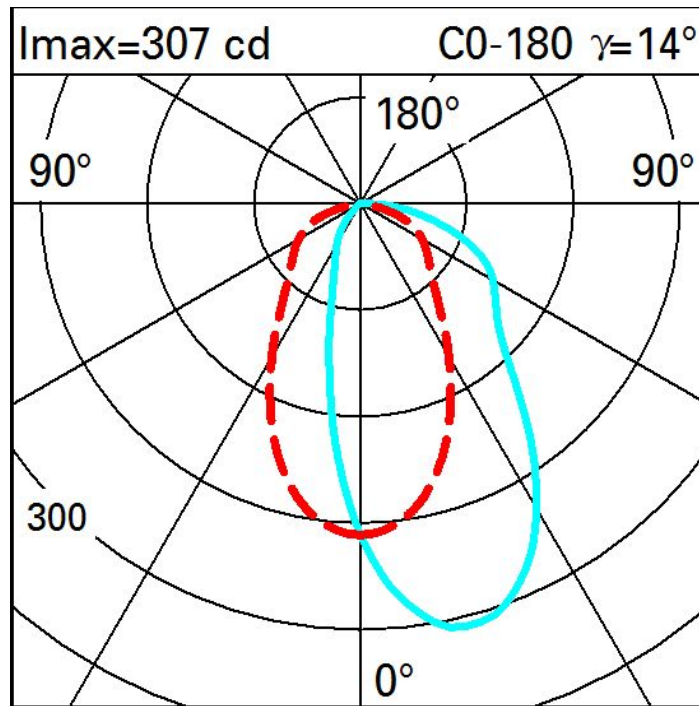

Illuminances

Lux										
Wall distance = 1 m										
3										
	1.0	2	6	15	42	72	42	15	6	2
2	2	4	8	17	37	52	37	17	8	4
	2	4	7	16	30	39	30	16	7	4
1	2	4	7	13	21	26	21	13	7	4
	2	3	6	10	14	16	14	10	6	3
0										
	m	-2	-1	0	1	2	3			