

Last information update: April 2024

Product configuration: Q226

Q226: rectangular recessed luminaire with 3 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - medium

**Product code**Q226: rectangular recessed luminaire with 3 optical assemblies - warm white passive dissipation LEDs - integrated DALI control gear - medium **Attention! Code no longer in production****Technical description**

Multiple recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp bodies with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing rings. Riflettori con ottica ad alta efficienza in alluminio superpuro - apertura medium. Orientamento dei corpi con dispositivi di manovra manuale: interno 29° - esterno 75° - rotazione sull'asse 355°; in fase di orientamento e rotazione i corpi lampada sono soggetti ad alcune limitazioni consultabili sul foglio istruzioni. Supplied with DALI dimmable control gear units connected to the luminaire. Warm white high efficiency LED.

Installation

recessed: preparation slot 138 x 386 mm; perimeter frame preliminary fixing on false ceiling (min. thickness 1 mm) with adjustable metal brackets; main structure inserted and mechanically locked on the frame

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections; each lamp body has a specific ballast, allowing separate switch ons

Notes

the configuration of the lamp bodies causes some limitations during angling and rotation; consult the instructions leaflet

Complies with EN60598-1 and pertinent regulations

**Technical data**

Im system:	7110	CRI:	80
W system:	73.8	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	2
W source:	22	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	96.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	3
Beam angle [°]:	22°	Control:	DALI


Polar

Imax=7973 cd	CIE nL 0.79 95-100-100-100-79 UGR 16.9-16.9 DIN A.61 UTE 0.79A+0.00T F*1=954 F*1+F*2=997 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m² at 65° UGR<19 L<1500 cd/mq @65°	Lux
90°	180°	h d Em Emax
90°	90°	2 0.8 1575 1993
9000	0°	4 1.6 394 498
α=22°		6 2.3 175 221
		8 3.1 98 125

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	62	62	59	75
1.0	73	70	67	65	69	66	66	63	80
1.5	77	75	72	71	74	72	71	68	87
2.0	80	78	76	75	77	75	74	72	91
2.5	81	80	79	78	79	78	77	75	94
3.0	82	81	80	80	80	79	78	76	96
4.0	84	83	82	81	81	81	80	78	98
5.0	84	83	83	83	82	82	80	78	99

Luminance curve limit

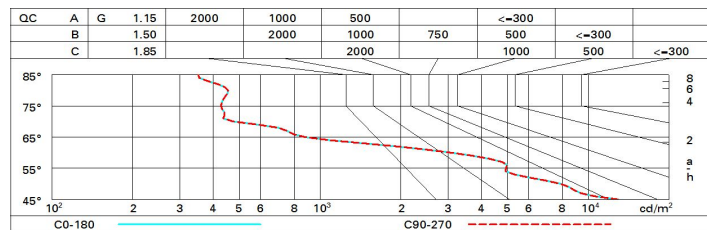

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.7	19.3	18.0	19.6	19.9	17.7	19.3	18.0	19.6	19.9
	3H	17.6	18.8	17.9	19.1	19.4	17.6	18.8	17.9	19.1	19.4
	4H	17.5	18.6	17.9	18.9	19.2	17.5	18.6	17.9	18.9	19.3
	6H	17.4	18.5	17.8	18.8	19.2	17.4	18.5	17.8	18.8	19.2
	8H	17.3	18.4	17.7	18.8	19.2	17.3	18.4	17.7	18.8	19.2
	12H	17.3	18.4	17.7	18.7	19.1	17.3	18.4	17.7	18.7	19.1
4H	2H	17.5	18.6	17.9	18.9	19.3	17.5	18.6	17.9	18.9	19.2
	3H	17.3	18.4	17.7	18.7	19.1	17.3	18.4	17.7	18.7	19.1
	4H	17.2	18.2	17.6	18.6	19.0	17.2	18.2	17.6	18.6	19.0
	6H	17.0	18.3	17.4	18.7	19.1	17.0	18.3	17.4	18.7	19.1
	8H	16.9	18.3	17.3	18.7	19.2	16.9	18.3	17.3	18.7	19.2
	12H	16.7	18.3	17.2	18.7	19.2	16.7	18.3	17.2	18.7	19.2
8H	4H	16.9	18.3	17.3	18.7	19.2	16.9	18.3	17.3	18.7	19.2
	6H	16.7	18.1	17.2	18.6	19.1	16.7	18.1	17.2	18.6	19.1
	8H	16.7	17.9	17.2	18.4	18.9	16.7	17.9	17.2	18.4	18.9
	12H	16.8	17.7	17.3	18.2	18.7	16.8	17.7	17.3	18.2	18.7
12H	4H	16.7	18.3	17.2	18.7	19.2	16.7	18.3	17.2	18.7	19.2
	6H	16.7	17.9	17.2	18.4	18.9	16.7	17.9	17.2	18.4	18.9
	8H	16.8	17.7	17.3	18.2	18.7	16.8	17.7	17.3	18.2	18.7
Variations with the observer position at spacing:											
S =	1.0H	4.3 / -9.6					4.3 / -9.6				
	1.5H	7.1 / -15.0					7.1 / -15.0				
	2.0H	9.1 / -18.0					9.1 / -18.0				