


Last information update: May 2025

Product configuration: N130

N130: wall-washer luminaire - Ø 125 mm - warm white - frame

**Product code**

N130: wall-washer luminaire - Ø 125 mm - warm white - frame

Technical description

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K (CRI 90).

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.02

Mounting

ceiling recessed

Wiring

product complete with DALI components

Notes


TPb rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1395	Colour temperature [K]:	3000
W system:	19.1	MacAdam Step:	2
lm source:	2250	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	17	Lamp code:	LED
Luminous efficiency (lm/W, real value):	73	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	62	Control:	DALI-2
CRI (minimum):	90		

Polar

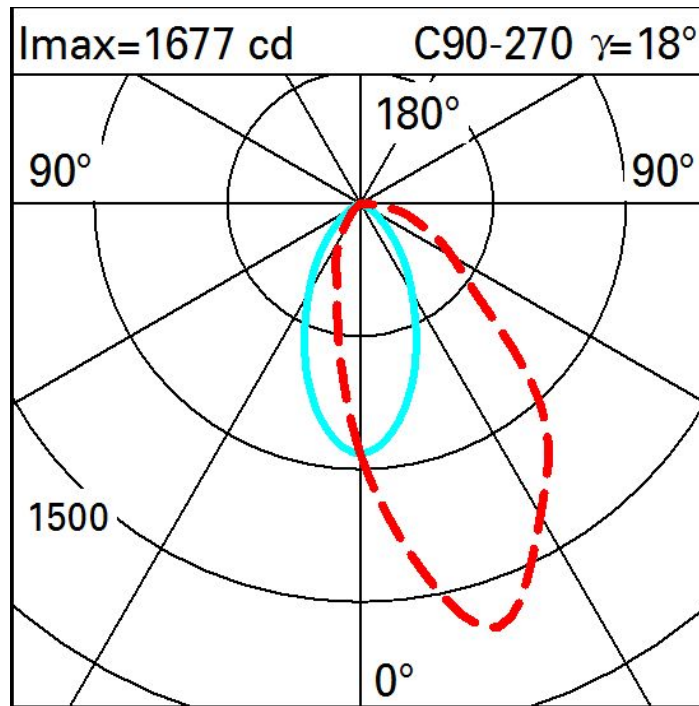

Illuminances

Lux												Wall distance = 1m	
3													
	0.2	0.8	4	19	104	236	104	19	4	0.8	0.2		
2	1	4	14	47	157	290	157	47	14	4	1		
	3	7	20	60	158	226	158	60	20	7	3		
1	4	9	22	55	105	138	105	55	22	9	4		
	5	10	21	42	68	87	68	42	21	10	5		
0													
	m	-2	-1	0	1	2	3						