

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: October 2024

Product configuration: QI70

QI70: Ceiling-mounted linear GL Pro - 5 cells

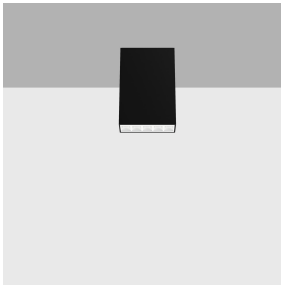

Product code

QI70: Ceiling-mounted linear GL Pro - 5 cells

Technical description

Ceiling-mounted luminaire with 5 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux optimised by a special diffuser screen that reduces direct glare significantly. Extruded aluminium main body and technical dissipation unit - shaped steel fixing plate. DALI dimmable electronic driver integrated in luminaire body.

Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

Colour

White (01) | Black/white (F2)

Weight (Kg)


0.45

Mounting

ceiling surface

Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.



Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	793	Voltage [Vin]:	230
W system:	12.5	Lamp code:	LED
Im source:	1150	Number of lamps for optical assembly:	1
W source:	10	ZVEI Code:	LED
Luminous efficiency (Im/W, real value):	63.5	Number of optical assemblies:	1
Im in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	5 A / 50 µs
Light Output Ratio (L.O.R.) [%]:	69	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	90	Minimum dimming %:	1
Colour temperature [K]:	4000	Overvoltage protection:	3kV Common mode & 2kV Differential mode
MacAdam Step:	2	Control:	DALI-2
Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)		


Polar

<p>Imax=953 cd α=54°</p>	<p>CIE nL 0.69 88-98-100-100-69 UGR 22.7-22.6 DIN A.61 UTE 0.69A+0.00T F*1=877 F*1+F*2=981 F*1+F*2+F*3=997</p>	Lux			
		h	d	Em	Emax
		1	1	707	953
		2	2	177	238
		3	3.1	79	106
4	4.1	44	60		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	58	54	51	49	54	51	51	48	69
1.0	62	58	55	53	57	55	54	52	75
1.5	66	63	61	59	62	60	60	57	83
2.0	69	66	65	63	65	64	63	61	88
2.5	70	68	67	66	67	66	65	63	92
3.0	71	70	69	68	69	68	67	65	94
4.0	72	71	70	70	70	69	68	66	96
5.0	73	72	71	71	71	70	69	67	97

Luminance curve limit

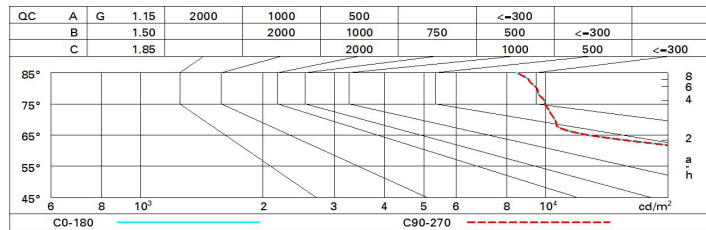

UGR diagram

Corrected UGR values (at 1150 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim											
x	y										
2H	2H	22.8	23.4	23.0	23.6	23.9	22.8	23.4	23.0	23.6	23.9
	3H	22.7	23.3	23.0	23.6	23.9	22.8	23.3	23.1	23.6	23.9
	4H	22.7	23.2	23.0	23.5	23.8	22.7	23.2	23.0	23.5	23.8
	6H	22.7	23.2	23.0	23.5	23.8	22.6	23.1	23.0	23.4	23.8
	8H	22.7	23.2	23.0	23.5	23.8	22.6	23.1	23.0	23.4	23.7
12H	22.7	23.1	23.0	23.5	23.8	22.6	23.0	22.9	23.4	23.7	
4H	2H	22.7	23.2	23.0	23.5	23.8	22.7	23.2	23.0	23.5	23.8
	3H	22.7	23.2	23.1	23.5	23.9	22.7	23.2	23.1	23.5	23.9
	4H	22.7	23.1	23.1	23.5	23.9	22.7	23.1	23.1	23.5	23.9
	6H	22.7	23.1	23.1	23.5	23.9	22.7	23.0	23.1	23.4	23.8
	8H	22.7	23.0	23.2	23.5	23.9	22.6	23.0	23.1	23.4	23.8
12H	22.7	23.0	23.2	23.4	23.9	22.6	22.9	23.0	23.3	23.8	
8H	4H	22.6	23.0	23.1	23.4	23.8	22.7	23.0	23.2	23.5	23.9
	6H	22.7	22.9	23.1	23.4	23.9	22.7	23.0	23.2	23.4	23.9
	8H	22.7	22.9	23.2	23.4	23.9	22.7	22.9	23.2	23.4	23.9
	12H	22.7	22.9	23.2	23.4	23.9	22.7	22.9	23.2	23.3	23.9
12H	4H	22.6	22.9	23.0	23.3	23.8	22.7	23.0	23.2	23.4	23.9
	6H	22.6	22.9	23.1	23.3	23.8	22.7	22.9	23.2	23.4	23.9
	8H	22.7	22.9	23.2	23.3	23.9	22.7	22.9	23.2	23.4	23.9
Variations with the observer position at spacing:											
S =	1.0H	2.4 / -2.2				2.4 / -2.2					
	1.5H	4.5 / -4.7				4.5 / -4.7					
	2.0H	6.3 / -6.0				6.3 / -6.0					