

**LEDPLUS CIRCULAR
SMALL**

I.2600 - 13
LAMPING FINISH


LEDPLUS is a ground / wall recessed luminaire. It is composed of machined stainless steel components and sealed with internal gaskets and a glass lens. It's maximum surface temperature is below 104°F (40°C).

LAMPING: 0.4W LED COOL WHITE 6000K, 24Vdc

PROJECT NAME: _____

TYPE: _____ **QTY:** _____

LAST UPDATE: JULY 18, 2018

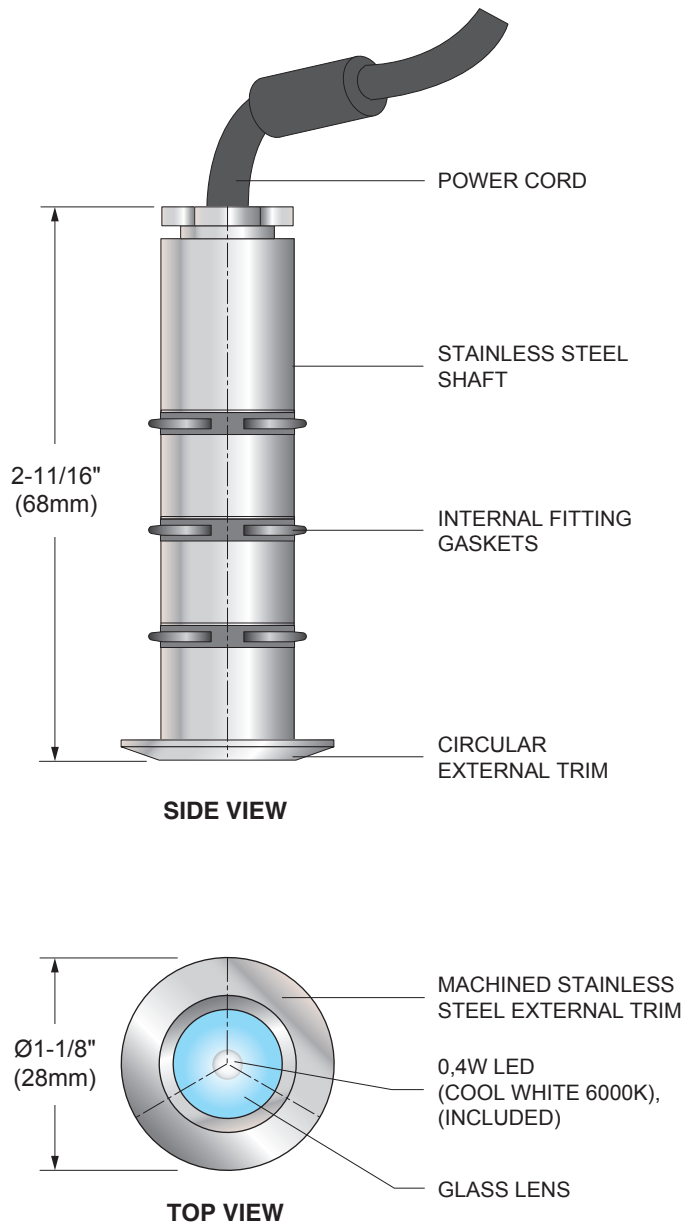

ACCESSORIES (TO BE ORDERED SEPARATELY)

- I.6938** - CASING FOR INSTALLATION INTO CONCRETE WALLS, SMALL ROUND BODY + END CAP; Ø 5-9/16" (141mm) X 1-1/8" (104mm)H
- I.6939** - CASING FOR INSTALLATION INTO TRADITIONAL FLOORING SMALL ROUND BODY+ END CAP; Ø 4-3/4" (120mm) X 4" (101mm)H
- I.6940** - CYLINDRICAL CASING FOR PLASTERBOARD OR SIMILAR WALLS; Ø 2" (21.2mm) X 7/8" (50mm)H
- I.9583** - SUCTION CUP

POWER SUPPLY OPTIONS (The total power of all connected luminaires must be less than or equal to the power of the driver.)

- Dry location**
- 4444-0024-010-120-ND:**
Input: 120V AC, Dry location, non dimmable
Quantity: Maximum 10W
DIM: 6" X 4" X 3" (152 X 102 X 76mm)
Max distance 18AWG: 20ft (6m)*.
 - 4444-0024-020-120-ND:**
Input: 120V AC, Dry location, non dimmable
Quantity: Maximum 20W
DIM: 6" X 4" X 3" (152 X 102 X 76mm)
Max distance 18AWG: 30ft (9m)*.
 - 4444-0024-025-UNV-ND:**
Input: 120-277V AC, Dry location, non dimmable
Quantity: Maximum 25W
DIM: 6" X 4" X 3" (152 X 102 X 76mm)
Max distance 18AWG: 20ft (6m)*.
- Wet location**
- 4548-0024-010-120-ND:**
Input: 120V AC, Wet location, non dimmable
Quantity: Maximum 10W
DIM: 7" X 4" X 3" (178 X 102 X 76mm)
Max distance 18AWG: 20ft (6m)*.
 - 4548-0024-017-120-ND:**
Input: 120V AC, Wet location, non dimmable
Quantity: Maximum 17W
DIM: 7" X 4" X 3" (178 X 102 X 76mm)
Max distance 18AWG: 30ft (9m)*.
 - 4548-0024-025-UNV-ND:**
Input: 120-277V AC, Wet location, non dimmable
Quantity: Maximum 25W
DIM: 7" X 4" X 3" (178 X 102 X 76mm)
Max distance 18AWG: 20ft (6m)*.

*For longer remote mounting distance, contact factory.

IP 68 IK 09

USE SUITABLE REMOTE POWER SUPPLY



9320 Boul. St-Laurent,
suite 100, Montréal (Québec)
Canada H2N 1N7
P.: 514.523.1339 F.: 514.525.6107

**LEDPLUS CIRCULAR
SMALL**