

Last information update: August 2023

Product configuration: MXN3

MXN3: Frame corner profile with LED module - neutral white - DALI dimmable electronic control gear



Product code

MXN3: Frame corner profile with LED module - neutral white - DALI dimmable electronic control gear **Attention! Code no longer in production**

Technical description

Corner element for Frame version profiles with perimeter rim; includes LED module, methacrylate opal screen, set up for connecting by overlapping, pass-through wiring for continuous lines. Neutral white high efficiency LED

Installation

Can be recessed using the special integrated brackets on the profile. To correctly complete a continuous line including a corner profile, use at least one initial module on each side of the corner.

Colour

White (01) | Aluminium (12)

Weight (Kg)

3.6

Mounting

ceiling recessed|ceiling surface|ceiling pendant

Wiring

The corner profile is supplied with pass-through wiring for continuous lines. Quick coupling terminal blocks for easier luminaire installation. LED module complete with DALI dimmable integrated electronic control gear.

Notes

Take care with the system configuration. To correctly complete a continuous line including a corner profile, always use two initial modules, to be applied on each side of the corner.


Complies with EN60598-1 and pertinent regulations



Technical data

lm system:	1897	Colour temperature [K]:	4000
W system:	21.4	MacAdam Step:	3
lm source:	1300	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	8.3	Ballast losses [W]:	2.4
Luminous efficiency (lm/W, real value):	88.7	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	2
CRI (minimum):	80	Control:	DALI

Polar

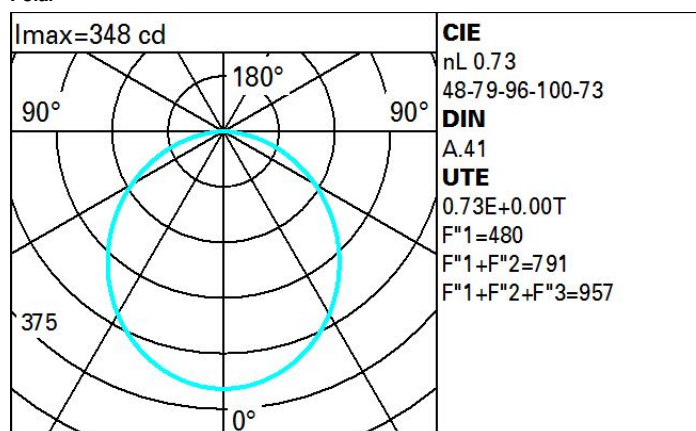

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	48	40	35	31	39	34	34	29	40
1.0	53	46	40	36	45	40	39	34	47
1.5	60	55	50	46	53	49	48	44	60
2.0	65	60	56	53	59	55	54	50	68
2.5	68	64	60	57	62	59	58	54	74
3.0	69	66	63	61	64	62	61	57	78
4.0	72	69	67	65	67	65	64	61	83
5.0	73	71	69	67	69	68	66	63	86

Luminance curve limit

