


Last information update: June 2025

**Product configuration: R329.01**

R329.01: body Ø 117 mm - wide flood optic - 28.5W 3999lm - 4000K - White

**Product code**

R329.01: body Ø 117 mm - wide flood optic - 28.5W 3999lm - 4000K - White

**Technical description**

Adjustable mediumlight with adapter for installation on a mains voltage track. Luminaire made of die-cast aluminium. mediumlight double adjustability allows a 360° rotation about the vertical axis and 90° tilting relative to the horizontal plane. Built-in dimmable DALI ballast. Luminaire complete with C.O.B. technology LED unit in neutral white colour 4000K. Anti-scratch reflector made of P.V.D (physical vapour deposition) aluminium that can provide optimum performance in terms of light efficiency. Wide Flood optic. Possibility of installing a flat accessory, like a glass cover or an elliptical distribution refractor. Interchangeable reflectors that can be ordered as an accessory.

**Installation**

On an electrified track or special base

**Colour**

White (01)

**Weight (Kg)**

1.1

**Mounting**

three circuit track

**Wiring**

Product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20

IP40

With accessory installed

**Technical data**

|  |       |  |  |
|--|-------|--|--|
| lm system:   | 3999  | MacAdam Step:  | 2  |
| W system:  | 28.5  | Life Time LED 1:   | > 50,000h - L90 - B10 (Ta 25°C)  |
| lm source:   | 4300  | Lamp code:   | LED  |
| W source:  | 25    | Number of lamps for optical assembly:                                    | 1  |
| Luminous efficiency (lm/W, real value):            | 140.3 | ZVEI Code:   | LED  |
| lm in emergency mode:                              | -     | Number of optical assemblies:  | 1  |
| Total light flux at or above an angle of 90° [Lm]: | 0     | Power factor:  | See installation instructions  |
| Light Output Ratio (L.O.R.) [%]:                   | 93    | Inrush current:  | 18 A / 250 µs  |
| Beam angle [°]:                                    | 42°   | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 21 luminaires<br>B16A: 34 luminaires<br>C10A: 35 luminaires<br>C16A: 57 luminaires |
| CRI (minimum):                                     | 80    | Minimum dimming %:   | 1  |
| Rf (Colour Fidelity Index):                        | 83    | Overvoltage protection:  | 2kV Common mode & 1kV Differential mode  |
| Rg (Gamut Index):                                  | 94    | Control:   | DALI-2   |
| Colour temperature [K]:                            | 4000  |  |  |


**Polar**

|   |   |     |      |      |            |  |  |  |
|---|---|-----|------|------|------------|--|--|--|
| <br>Imax=8009 cd<br>90° 180° 90°<br>9000<br>0°<br>α=43° | <b>CIE</b><br>nL 0.93<br>98-100-100-100-93<br>UGR 15.1-15.1<br><b>DIN</b><br>A.61<br><b>UTE</b><br>0.93A+0.00T<br>F*1=979<br>F*1+F*2=999<br>F*1+F*2+F*3=1000<br><b>CIBSE</b><br>LG3 L<3000 cd/m² at 65°<br>UGR<16   L<3000 cd/mq @65° |     |      |      | <b>Lux</b> |  |  |  |
|   | h   | d   | Em   | Emax |            |  |  |  |
|   | 2   | 1.6 | 1570 | 2002 |            |  |  |  |
|   | 4   | 3.1 | 393  | 501  |            |  |  |  |
|   | 6   | 4.7 | 174  | 222  |            |  |  |  |
|   | 8   | 6.3 | 98   | 125  |            |  |  |  |

# Utilisation factors

| R    | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
|------|----|----|----|----|----|----|----|----|-----|
| K0.8 | 83 | 79 | 76 | 73 | 78 | 75 | 75 | 72 | 77  |
| 1.0  | 87 | 83 | 80 | 78 | 82 | 79 | 79 | 76 | 82  |
| 1.5  | 92 | 89 | 86 | 84 | 87 | 85 | 84 | 82 | 88  |
| 2.0  | 94 | 92 | 90 | 89 | 91 | 89 | 88 | 86 | 92  |
| 2.5  | 96 | 95 | 93 | 92 | 93 | 92 | 91 | 88 | 95  |
| 3.0  | 97 | 96 | 95 | 94 | 95 | 94 | 93 | 90 | 97  |
| 4.0  | 99 | 98 | 97 | 96 | 96 | 96 | 94 | 92 | 99  |
| 5.0  | 99 | 99 | 98 | 98 | 97 | 97 | 95 | 93 | 100 |

# Luminance curve limit

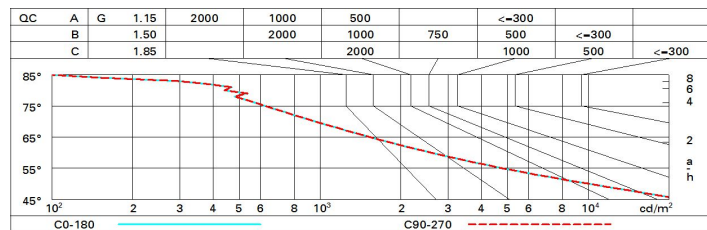

# UGR diagram

| Corrected UGR values (at 4300 lm bare lamp luminous flux)        |      |                     |      |      |      |      |                   |      |      |      |      |
|--|------|---------------------|------|------|------|------|-------------------|------|------|------|------|
| Reflect.:<br>ceiling/cav<br>walls<br>work pl.<br>Room dim<br>x y |      | 0.70                | 0.70 | 0.50 | 0.50 | 0.30 | 0.70              | 0.70 | 0.50 | 0.50 | 0.30 |
|  |      | 0.50                | 0.30 | 0.50 | 0.30 | 0.30 | 0.50              | 0.30 | 0.50 | 0.30 | 0.30 |
|  |      | 0.20                | 0.20 | 0.20 | 0.20 | 0.20 | 0.20              | 0.20 | 0.20 | 0.20 | 0.20 |
|  |      | viewed<br>crosswise |      |      |      |      | viewed<br>endwise |      |      |      |      |
| 2H   | 2H   | 15.6                | 16.2 | 15.9 | 16.5 | 16.7 | 15.6              | 16.2 | 15.9 | 16.5 | 16.7 |
|  | 3H   | 15.5                | 16.0 | 15.8 | 16.3 | 16.6 | 15.5              | 16.1 | 15.8 | 16.3 | 16.6 |
|  | 4H   | 15.4                | 15.9 | 15.8 | 16.2 | 16.5 | 15.4              | 15.9 | 15.8 | 16.2 | 16.5 |
|  | 6H   | 15.3                | 15.8 | 15.7 | 16.1 | 16.5 | 15.3              | 15.8 | 15.7 | 16.1 | 16.5 |
|  | 8H   | 15.3                | 15.8 | 15.7 | 16.1 | 16.4 | 15.3              | 15.8 | 15.7 | 16.1 | 16.4 |
|  | 12H  | 15.3                | 15.7 | 15.6 | 16.0 | 16.4 | 15.3              | 15.7 | 15.7 | 16.0 | 16.4 |
| 4H   | 2H   | 15.4                | 15.9 | 15.8 | 16.2 | 16.5 | 15.4              | 15.9 | 15.8 | 16.2 | 16.5 |
|  | 3H   | 15.3                | 15.7 | 15.7 | 16.1 | 16.4 | 15.3              | 15.7 | 15.7 | 16.1 | 16.4 |
|  | 4H   | 15.2                | 15.6 | 15.6 | 15.9 | 16.3 | 15.2              | 15.6 | 15.6 | 15.9 | 16.3 |
|  | 6H   | 15.1                | 15.4 | 15.5 | 15.8 | 16.3 | 15.1              | 15.4 | 15.5 | 15.8 | 16.3 |
|  | 8H   | 15.1                | 15.4 | 15.5 | 15.8 | 16.2 | 15.1              | 15.4 | 15.5 | 15.8 | 16.2 |
|  | 12H  | 15.0                | 15.3 | 15.5 | 15.7 | 16.2 | 15.0              | 15.3 | 15.5 | 15.7 | 16.2 |
| 8H   | 4H   | 15.1                | 15.4 | 15.5 | 15.8 | 16.2 | 15.1              | 15.4 | 15.5 | 15.8 | 16.2 |
|  | 6H   | 15.0                | 15.2 | 15.4 | 15.7 | 16.1 | 15.0              | 15.2 | 15.4 | 15.7 | 16.1 |
|  | 8H   | 14.9                | 15.1 | 15.4 | 15.6 | 16.1 | 14.9              | 15.1 | 15.4 | 15.6 | 16.1 |
|  | 12H  | 14.9                | 15.1 | 15.4 | 15.5 | 16.1 | 14.9              | 15.1 | 15.4 | 15.5 | 16.1 |
| 12H  | 4H   | 15.0                | 15.3 | 15.5 | 15.7 | 16.2 | 15.0              | 15.3 | 15.5 | 15.7 | 16.2 |
|  | 6H   | 14.9                | 15.1 | 15.4 | 15.6 | 16.1 | 14.9              | 15.1 | 15.4 | 15.6 | 16.1 |
|  | 8H   | 14.9                | 15.1 | 15.4 | 15.5 | 16.1 | 14.9              | 15.1 | 15.4 | 15.5 | 16.1 |
| Variations with the observer position at spacing:                |      |                     |      |      |      |      |                   |      |      |      |      |
| S =  | 1.0H | 4.9 / -10.8         |      |      |      |      | 4.9 / -10.8       |      |      |      |      |
|  | 1.5H | 7.6 / -14.7         |      |      |      |      | 7.6 / -14.7       |      |      |      |      |
|  | 2.0H | 9.6 / -16.7         |      |      |      |      | 9.6 / -16.7       |      |      |      |      |