


Last information update: July 2025

**Product configuration: N134**

N134: wall-washer luminaire - Ø 153 mm - warm white - frame

**Product code**

N134: wall-washer luminaire - Ø 153 mm - warm white - frame

**Technical description**

Recessed round wall-washer luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours and finished with a protective anti-scratch layer to create a vertical downward beam of light. Die-cast aluminium body and passive dissipation system. Product complete with C.O.B. LED lamp in warm white colour tone 3000K.

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 25 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1.22

**Mounting**

ceiling recessed

**Wiring**

product complete with DALI components

**Notes**


TPb rated

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	1787	Colour temperature [K]:	3000
W system:	24.9	MacAdam Step:	2
lm source:	3250	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	22	Lamp code:	LED
Luminous efficiency (lm/W, real value):	71.8	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	55	Control:	DALI-2
CRI (minimum):	80		

Polar

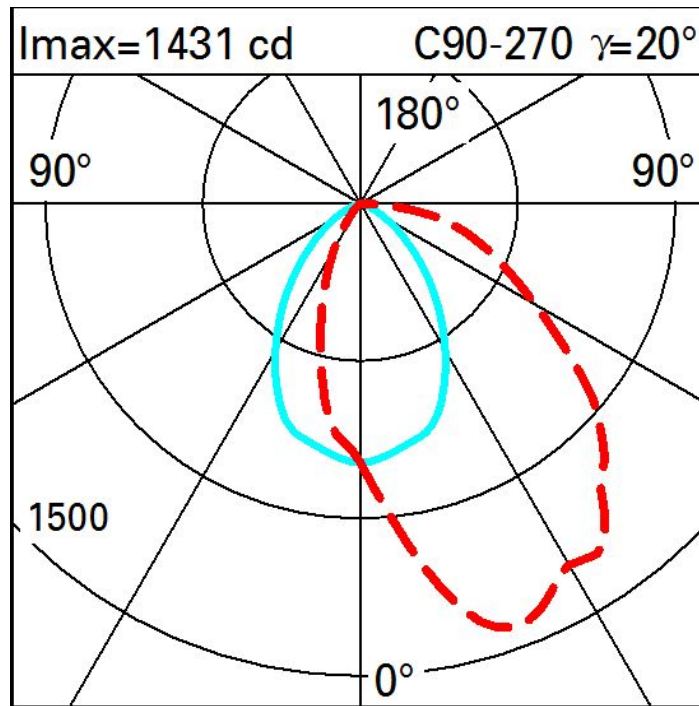

Illuminances

Lux											
						Wall distance = 1m					
3											
	0.8	3	13	54	209	384	209	54	13	3	0.8
2	4	10	30	96	262	398	262	96	30	10	4
	6	15	40	95	173	245	173	95	40	15	6
1	8	18	36	66	102	130	102	66	36	18	8
	9	17	29	43	63	77	63	43	29	17	9
0											
	m	-2	-1	0	1	2	3				