

Last information update: April 2025

Product configuration: MV94

MV94: Fixed circular recessed luminaire - Ø 96 mm - warm white - medium optic - UGR<19



Product code

MV94: Fixed circular recessed luminaire - Ø 96 mm - warm white - medium optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in warm white colour tone CRI 90 (3000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° medium optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

0.65

Mounting

ceiling recessed


Wiring

product complete with DALI components

Notes

TPb rated


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1202	CRI (minimum):	90
W system:	14.1	Colour temperature [K]:	3000
Im source:	1650	MacAdam Step:	2
W source:	12	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	85.2	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	73	Number of optical assemblies:	1
Beam angle [°]:	24°	Control:	DALI-2


Polar

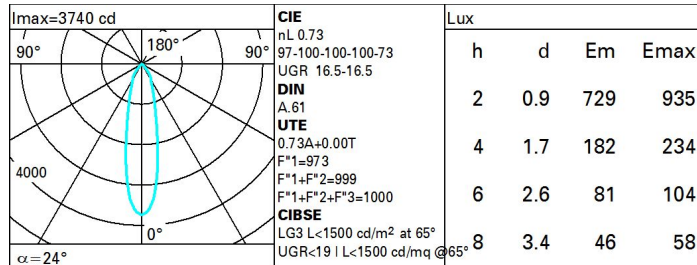

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	65	61	59	57	61	58	58	56	77
1.0	68	65	62	61	64	62	62	59	81
1.5	72	69	67	66	68	67	66	64	88
2.0	74	72	71	70	71	70	69	67	92
2.5	75	74	73	72	73	72	71	69	95
3.0	76	75	75	74	74	73	73	71	97
4.0	77	76	76	75	75	75	74	72	99
5.0	78	77	77	76	76	76	74	73	100

Luminance curve limit

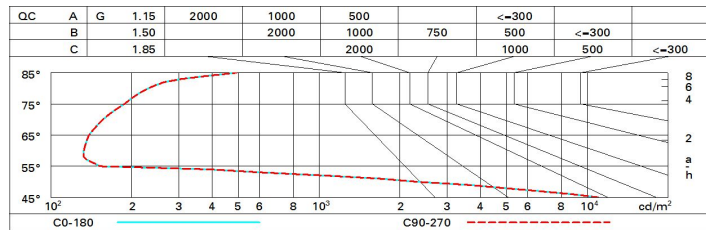

UGR diagram

Corrected UGR values (at 1650 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.4	19.0	17.7	19.3	19.6	17.4	19.0	17.7	19.3	19.6
	3H	17.2	18.5	17.6	18.8	19.1	17.2	18.5	17.6	18.8	19.1
	4H	17.1	18.3	17.5	18.6	19.0	17.1	18.3	17.5	18.6	19.0
	6H	17.0	18.2	17.4	18.5	18.9	17.0	18.2	17.4	18.5	18.9
	8H	17.0	18.1	17.4	18.5	18.8	17.0	18.1	17.4	18.5	18.8
	12H	16.9	18.0	17.3	18.4	18.8	16.9	18.0	17.3	18.4	18.8
4H	2H	17.1	18.3	17.5	18.6	19.0	17.1	18.3	17.5	18.6	19.0
	3H	16.9	18.0	17.3	18.4	18.8	16.9	18.0	17.3	18.4	18.8
	4H	16.8	17.9	17.3	18.3	18.7	16.8	17.9	17.3	18.3	18.7
	6H	16.6	17.9	17.1	18.3	18.8	16.6	17.9	17.1	18.3	18.8
	8H	16.5	17.9	17.0	18.4	18.8	16.5	17.9	17.0	18.4	18.8
	12H	16.4	17.9	16.9	18.4	18.9	16.4	17.9	16.9	18.4	18.9
8H	4H	16.5	17.9	17.0	18.4	18.8	16.5	17.9	17.0	18.4	18.8
	6H	16.3	17.8	16.8	18.3	18.8	16.3	17.8	16.8	18.3	18.8
	8H	16.3	17.6	16.8	18.1	18.6	16.3	17.6	16.8	18.1	18.6
	12H	16.4	17.3	16.9	17.8	18.4	16.4	17.3	16.9	17.8	18.4
12H	4H	16.4	17.9	16.9	18.4	18.9	16.4	17.9	16.9	18.4	18.9
	6H	16.3	17.6	16.8	18.1	18.6	16.3	17.6	16.8	18.1	18.6
	8H	16.4	17.3	16.9	17.8	18.4	16.4	17.3	16.9	17.8	18.4
Variations with the observer position at spacing:											
S =	1.0H	4.4 / -22.6					4.4 / -22.6				
	1.5H	7.2 / -22.8					7.2 / -22.8				
	2.0H	9.2 / -23.1					9.2 / -23.1				