


Last information update: April 2024

Product configuration: N001.Y

N001.Y: Fixed circular recessed luminaire - Ø125 mm - neutral white - wide flood optic - UGR<19

**Product code**

N001.Y: Fixed circular recessed luminaire - Ø125 mm - neutral white - wide flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° wide flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

1.02

Mounting

ceiling recessed

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations



IP20


IP54

On the visible part of the product once installed

**Technical data**

lm system:	2024	CRI (minimum):	80
W system:	17.7	Colour temperature [K]:	4000
lm source:	2500	MacAdam Step:	2
W source:	16	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	114.3	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	81	Number of optical assemblies:	1
Beam angle [°]:	64°	Control:	DALI-2


Polar

 <p>Imax=2007 cd 90° 180° 90° 2000 0° α=64°</p>	CIE nL 0.81 96-100-100-100-81 UGR 18.8-18.8 DIN A.61 UTE 0.81A+0.00T F*1=961 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65° UGR<19 L<1500 cd/mq @ 65°	Lux			
		h	d	Em	Emax
		2	2.5	384	502
		4	5	96	125
		6	7.5	43	56
		8	10	24	31

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	72	68	65	63	67	64	64	61	76
1.0	75	72	69	67	71	68	68	65	81
1.5	79	77	74	73	76	74	73	70	87
2.0	82	80	78	77	79	77	77	74	92
2.5	84	82	81	80	81	80	79	77	95
3.0	85	84	83	82	82	81	80	78	97
4.0	86	85	84	84	83	83	82	80	98
5.0	86	86	85	85	84	84	82	80	99

Luminance curve limit

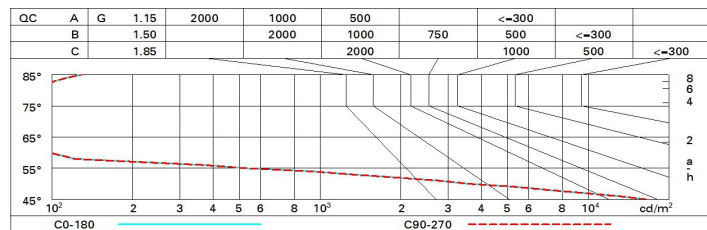

UGR diagram

Corrected UGR values (at 2500 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	19.4	20.0	19.6	20.2	20.4	19.4	20.0	19.6	20.2	20.4
	3H	19.2	19.8	19.5	20.0	20.3	19.2	19.8	19.5	20.0	20.3
	4H	19.2	19.7	19.5	19.9	20.2	19.2	19.7	19.5	19.9	20.2
	6H	19.1	19.5	19.4	19.9	20.2	19.1	19.5	19.4	19.9	20.2
	8H	19.0	19.5	19.4	19.8	20.1	19.0	19.5	19.4	19.8	20.1
	12H	19.0	19.4	19.4	19.8	20.1	19.0	19.4	19.4	19.8	20.1
4H	2H	19.2	19.7	19.5	19.9	20.2	19.2	19.7	19.5	19.9	20.2
	3H	19.0	19.4	19.4	19.8	20.1	19.0	19.4	19.4	19.8	20.1
	4H	18.9	19.3	19.3	19.7	20.0	18.9	19.3	19.3	19.7	20.0
	6H	18.8	19.2	19.3	19.6	20.0	18.8	19.2	19.3	19.6	20.0
	8H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
	12H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9
8H	4H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
	6H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
	8H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
	12H	18.6	18.8	19.1	19.2	19.8	18.6	18.8	19.1	19.2	19.8
12H	4H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9
	6H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
	8H	18.6	18.8	19.1	19.2	19.8	18.6	18.8	19.1	19.2	19.8
Variations with the observer position at spacing:											
S =	1.0H	4.7 / -26.2					4.7 / -26.2				
	1.5H	7.5 / -31.2					7.5 / -31.2				
	2.0H	9.5 / -31.4					9.5 / -31.4				