



Design iGuzzini iGuzzini

Product configuration: P931
P931: Deep Frame - 3 elements - CoB warm LED - wide flood beam



P931: Deep Frame - 3 elements - CoB warm LED - wide flood beam **Attention! Code no longer in production**

Three element recessed luminaire for an LED lamp. Version with a perimeter frame. Shaped sheet steel structural frame. Die-cast aluminium, twin swivel universal joints located in a position set back from the installation surface to guarantee a high level of visual comfort. Tilts $\pm 30^\circ$ around both the horizontal and vertical axes. Die-cast aluminium lighting bodies designed to optimise heat dispersal. High efficiency aluminium reflectors - wide flood angle. High color rendering index, warm white LED lamps. Each lamp unit has its own glass cover. Mechanical installation system. Control gear units included.

Recessed in 1 to 30mm thick false ceilings - secured with manually adjustable metal brackets. Preparation hole 169 x 327.

White (01) | Grey / Black (74)

ceiling recessed

Complete with electronic control gear units connected to the luminaire. Wiring for connecting to mains network on driver terminal board. For the dimensions of the installation compartment see the instructions sheet.

Accessories available: refractor for elliptical flow distribution - interchangeable reflector.


 IP20 IP23 On the visible part of the product once installed


Im system:	6833	CRI:	90
W system:	92.3	Colour temperature [K]:	3000
Im source:	3000	MacAdam Step:	3
W source:	27	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	74	Ballast losses [W]:	3.8
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	76	ZVEI Code:	LED
Beam angle [°]:	48°	Number of optical assemblies:	3

<p>Imax=3651 cd</p> <p>90° 180° 90°</p> <p>4000</p> <p>0°</p> <p>α=48°</p>	CIE nL 0.76 99-100-100-100-76 UGR 11.7-11.7		Lux			
	DIN A.61		h	d	Em	E _{max}
	UTE 0.76A+0.00T F*1=988 F*1+F*2=998 F*1+F*2+F*3=1000		2	1.8	727	912
	CIBSE LG3 Lc1500 cd/m² at 65° UGR<16 Lc1500 cd/mq @65°		4	3.6	182	228
			6	5.3	81	101
			8	7.1	45	57

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	65	62	60	64	62	61	59	78
1.0	71	68	66	64	67	65	65	62	82
1.5	75	72	71	69	72	70	69	67	88
2.0	77	75	74	73	74	73	72	70	93
2.5	79	77	76	75	76	75	74	72	95
3.0	80	79	78	77	77	77	76	74	97
4.0	81	80	79	79	79	78	77	75	99
5.0	81	81	80	80	79	79	78	76	100

Luminance curve limit

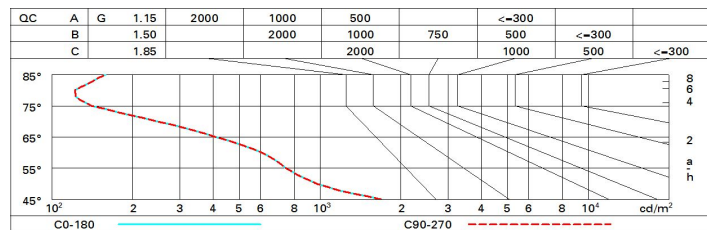

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
		viewed crosswise					viewed endwise				
2H	2H	12.3	12.8	12.5	13.0	13.3	12.3	12.8	12.5	13.0	13.3
	3H	12.1	12.6	12.4	12.9	13.2	12.1	12.6	12.4	12.9	13.2
	4H	12.1	12.5	12.4	12.8	13.1	12.1	12.5	12.4	12.8	13.1
	6H	12.0	12.4	12.3	12.7	13.1	12.0	12.4	12.3	12.7	13.1
	8H	12.0	12.4	12.3	12.7	13.0	11.9	12.4	12.3	12.7	13.0
	12H	11.9	12.3	12.3	12.6	13.0	11.9	12.3	12.3	12.6	13.0
4H	2H	12.1	12.5	12.4	12.8	13.1	12.1	12.5	12.4	12.8	13.1
	3H	11.9	12.3	12.3	12.7	13.0	11.9	12.3	12.3	12.7	13.0
	4H	11.8	12.2	12.2	12.5	12.9	11.8	12.2	12.2	12.5	12.9
	6H	11.7	12.1	12.2	12.4	12.9	11.7	12.1	12.2	12.4	12.9
	8H	11.7	12.0	12.1	12.4	12.8	11.7	12.0	12.1	12.4	12.8
	12H	11.6	11.9	12.1	12.3	12.8	11.6	11.9	12.1	12.3	12.8
8H	4H	11.7	12.0	12.1	12.4	12.8	11.7	12.0	12.1	12.4	12.8
	6H	11.6	11.8	12.1	12.3	12.8	11.6	11.8	12.1	12.3	12.8
	8H	11.6	11.8	12.0	12.2	12.7	11.6	11.8	12.0	12.2	12.7
	12H	11.5	11.7	12.0	12.2	12.7	11.5	11.7	12.0	12.2	12.7
12H	4H	11.6	11.9	12.1	12.3	12.8	11.6	11.9	12.1	12.3	12.8
	6H	11.5	11.7	12.0	12.2	12.7	11.6	11.8	12.0	12.2	12.7
	8H	11.5	11.7	12.0	12.2	12.7	11.5	11.7	12.0	12.2	12.7
Variations with the observer position at spacing:											
S =	1.0H	6.1 / -13.4					6.1 / -13.4				
	1.5H	8.9 / -14.8					8.9 / -14.8				
	2.0H	10.9 / -16.5					10.9 / -16.5				