


Isolux

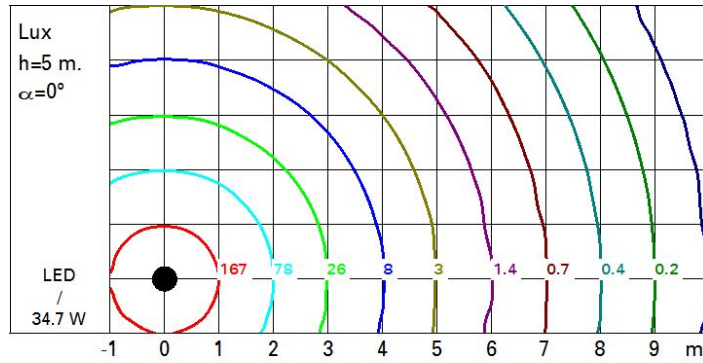

UGR diagram

Corrected UGR values (at 4100 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav											
walls											
work pl.											
Room dim											
x y											
		viewed crosswise					viewed endwise				
2H	2H	18.9	19.5	19.2	19.8	20.0	18.9	19.5	19.2	19.8	20.0
	3H	19.0	19.6	19.3	19.9	20.1	18.9	19.5	19.2	19.8	20.1
	4H	19.0	19.5	19.3	19.8	20.1	18.9	19.4	19.2	19.7	20.0
	6H	18.9	19.4	19.3	19.7	20.1	18.8	19.3	19.2	19.6	20.0
	8H	18.9	19.4	19.3	19.7	20.0	18.8	19.3	19.2	19.6	19.9
	12H	18.9	19.3	19.2	19.7	20.0	18.8	19.2	19.1	19.6	19.9
4H	2H	18.9	19.4	19.2	19.7	20.0	19.0	19.5	19.3	19.8	20.1
	3H	19.1	19.5	19.4	19.9	20.2	19.1	19.5	19.4	19.9	20.2
	4H	19.0	19.4	19.4	19.8	20.2	19.0	19.4	19.4	19.8	20.2
	6H	19.0	19.3	19.4	19.7	20.2	19.0	19.3	19.4	19.7	20.2
	8H	18.9	19.3	19.4	19.7	20.1	19.0	19.3	19.4	19.7	20.1
	12H	18.9	19.2	19.3	19.6	20.1	18.9	19.2	19.4	19.6	20.1
8H	4H	19.0	19.3	19.4	19.7	20.1	18.9	19.3	19.4	19.7	20.1
	6H	18.9	19.2	19.4	19.6	20.1	18.9	19.2	19.4	19.6	20.1
	8H	18.8	19.1	19.3	19.5	20.0	18.8	19.1	19.3	19.5	20.0
	12H	18.8	19.0	19.3	19.5	20.0	18.8	19.0	19.3	19.5	20.0
12H	4H	18.9	19.2	19.4	19.6	20.1	18.9	19.2	19.3	19.6	20.1
	6H	18.8	19.1	19.3	19.5	20.0	18.8	19.1	19.3	19.5	20.0
	8H	18.8	19.0	19.3	19.5	20.0	18.8	19.0	19.3	19.5	20.0
Variations with the observer position at spacing:											
S =	1.0H		2.8	/	-2.8				2.8	/	-2.8
	1.5H		5.1	/	-4.3				5.1	/	-4.3
	2.0H		6.9	/	-5.5				6.9	/	-5.5