


Polaire

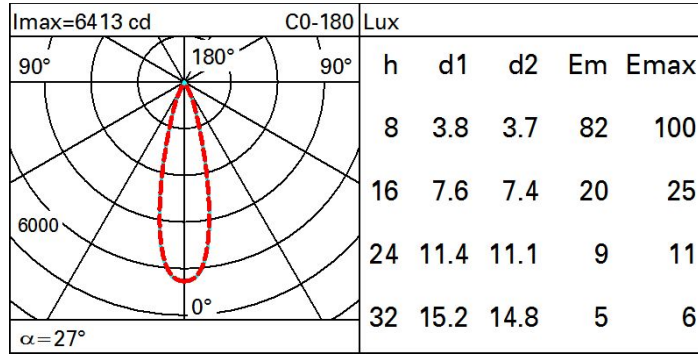

Isolux

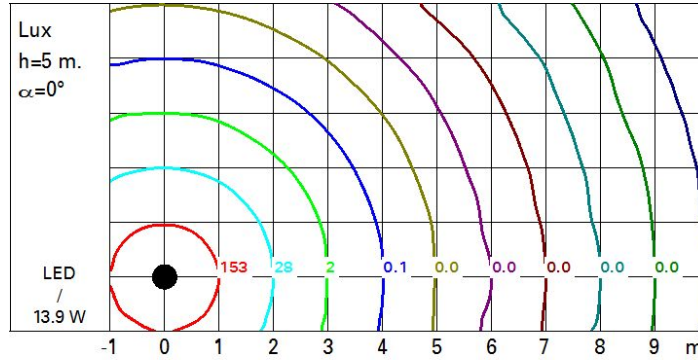


Diagramme UGR

Corrected UGR values (at 1870 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceill/cav	walls	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
work pl.	Room dim	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
x	y	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	-6.6	-4.4	-6.2	-4.1	-3.7	-6.4	-4.2	-6.0	-3.9	-3.5
	3H	-6.6	-4.9	-6.2	-4.6	-4.2	-6.4	-4.7	-6.1	-4.4	-4.1
	4H	-6.6	-5.2	-6.2	-4.8	-4.5	-6.5	-5.1	-6.1	-4.7	-4.4
	6H	-6.5	-5.5	-6.2	-5.1	-4.8	-6.5	-5.4	-6.1	-5.1	-4.7
	8H	-6.6	-5.5	-6.2	-5.2	-4.8	-6.5	-5.5	-6.1	-5.1	-4.8
	12H	-6.6	-5.6	-6.2	-5.2	-4.8	-6.6	-5.6	-6.2	-5.2	-4.8
4H	2H	-6.6	-5.3	-6.3	-4.9	-4.6	-6.4	-5.0	-6.0	-4.7	-4.3
	3H	-6.6	-5.6	-6.2	-5.2	-4.8	-6.4	-5.4	-6.0	-5.0	-4.6
	4H	-6.6	-5.6	-6.2	-5.2	-4.8	-6.5	-5.5	-6.0	-5.1	-4.7
	6H	-6.9	-5.2	-6.4	-4.7	-4.3	-6.8	-5.1	-6.3	-4.6	-4.2
	8H	-7.0	-5.1	-6.5	-4.6	-4.1	-6.9	-5.0	-6.4	-4.5	-4.0
	12H	-7.1	-5.1	-6.6	-4.6	-4.1	-7.0	-5.0	-6.5	-4.5	-4.0
8H	4H	-7.1	-5.1	-6.6	-4.7	-4.2	-6.9	-5.0	-6.4	-4.5	-4.0
	6H	-7.1	-5.3	-6.6	-4.8	-4.3	-7.0	-5.1	-6.5	-4.6	-4.1
	8H	-7.1	-5.5	-6.6	-5.0	-4.4	-7.0	-5.3	-6.5	-4.8	-4.3
	12H	-6.8	-5.8	-6.3	-5.3	-4.7	-6.8	-5.7	-6.3	-5.2	-4.7
12H	4H	-7.2	-5.2	-6.7	-4.7	-4.2	-6.9	-4.9	-6.4	-4.4	-3.9
	6H	-7.1	-5.5	-6.6	-5.0	-4.5	-6.9	-5.3	-6.4	-4.8	-4.2
	8H	-6.9	-5.9	-6.4	-5.4	-4.8	-6.7	-5.6	-6.2	-5.1	-4.6
Variations with the observer position at spacing:											
S =	1.0H	5.5 / -3.9					5.7 / -4.3				
	1.5H	8.2 / -4.5					8.4 / -4.8				
	2.0H	10.2 / -6.2					10.3 / -6.3				