
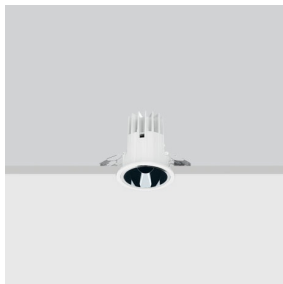


Last information update: April 2024

Product configuration: MV80

MV80: Fixed circular recessed luminaire - Ø 75 mm - neutral white - flood optic - UGR<19

**Product code**

MV80: Fixed circular recessed luminaire - Ø 75 mm - neutral white - flood optic - UGR<19

Technical description

Fixed round luminaire designed to use a LED lamp with C.O.B. technology. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with LED lamp in neutral white colour tone (4,000K). General light emission, with controlled luminance UGR<19 1500 cd/m² α>65° flood optic.

Installation

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

Colour

White / Aluminium (39)

Weight (Kg)

0.41

Mounting

ceiling recessed

Wiring

product complete with DALI components

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	817	MacAdam Step:	2
W system:	8.6	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
lm source:	1050	Lamp code:	LED
W source:	6.3	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	95	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	78	Inrush current:	16 A / 220 µs
Beam angle [°]:	28°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 15 luminaires B16A: 24 luminaires C10A: 24 luminaires C16A: 40 luminaires
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	4000	Control:	DALI-2


Polar

	CIE nL 0.78 100-100-100-100-78 UGR 11.2-11.2 DIN A.61 UTE 0.78A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 CIBSE LG3 L<1500 cd/m ² at 65° UGR<16 L<1500 cd/m ² @65°			
	h	d	Em	Emax
	2	1	487	605
	4	2	122	151
	6	3	54	67
	8	4	30	38

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	67	64	62	66	64	63	61	78
1.0	73	70	68	66	69	67	67	64	83
1.5	77	75	73	71	74	72	71	69	89
2.0	79	78	76	75	76	75	74	72	93
2.5	81	79	78	78	78	77	77	74	96
3.0	82	81	80	79	80	79	78	76	98
4.0	83	82	82	81	81	80	79	77	99
5.0	83	83	82	82	81	81	80	78	100

Luminance curve limit

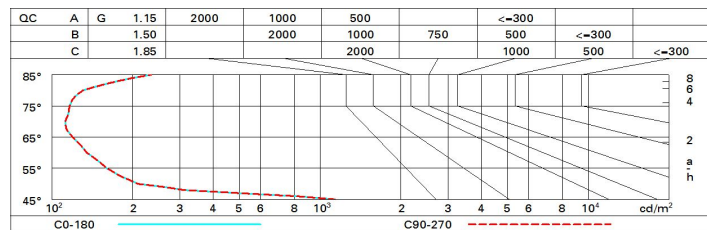

UGR diagram

Corrected UGR values (at 1050 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	12.1	14.1	12.5	14.4	14.8	12.1	14.1	12.5	14.4	14.8
	3H	12.0	13.5	12.3	13.9	14.2	12.0	13.5	12.3	13.9	14.2
	4H	11.9	13.3	12.3	13.6	14.0	11.9	13.3	12.3	13.6	14.0
	6H	11.8	13.1	12.2	13.4	13.8	11.8	13.0	12.2	13.4	13.8
	8H	11.8	13.0	12.2	13.3	13.7	11.8	13.0	12.2	13.3	13.7
	12H	11.7	12.9	12.1	13.3	13.6	11.7	12.9	12.1	13.3	13.6
4H	2H	11.9	13.3	12.3	13.6	14.0	11.9	13.3	12.3	13.6	14.0
	3H	11.7	12.9	12.1	13.3	13.6	11.7	12.9	12.1	13.3	13.6
	4H	11.6	12.7	12.1	13.1	13.5	11.6	12.7	12.1	13.1	13.5
	6H	11.3	12.9	11.8	13.3	13.8	11.3	12.9	11.8	13.3	13.8
	8H	11.2	12.9	11.7	13.4	13.9	11.2	12.9	11.7	13.4	13.9
	12H	11.1	12.9	11.6	13.4	13.9	11.1	12.9	11.6	13.4	13.9
8H	4H	11.2	12.9	11.7	13.4	13.9	11.2	12.9	11.7	13.4	13.9
	6H	11.1	12.8	11.6	13.3	13.8	11.1	12.8	11.6	13.3	13.8
	8H	11.0	12.6	11.5	13.1	13.6	11.0	12.6	11.5	13.1	13.6
	12H	11.2	12.1	11.7	12.6	13.2	11.2	12.1	11.7	12.6	13.2
12H	4H	11.1	12.9	11.6	13.4	13.9	11.1	12.9	11.6	13.4	13.9
	6H	11.0	12.6	11.5	13.1	13.6	11.0	12.6	11.5	13.1	13.6
	8H	11.2	12.1	11.7	12.6	13.2	11.2	12.1	11.7	12.6	13.2
Variations with the observer position at spacing:											
S =		1.0H	6.3 / -21.8				6.3 / -21.8				
		1.5H	9.1 / -22.1				9.1 / -22.1				
		2.0H	11.1 / -22.3				11.1 / -22.3				