

Platea Pro

Design Jean-Michel
Wilmotte

iGuzzini

Last information update: April 2024

Product configuration: E805

E805: Platea Pro



Product code

E805: Platea Pro **Attention! Code no longer in production**

Technical description

Outdoor luminaire with a SuperSpot optic, designed to use LED lamps. Made up of an optical assembly, base and all glass finish with black serigraphy to add extra style. The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. With a 5 mm thick colourless transparent tempered sodium-calcium glass cover. The product can be tilted by +5°/-90° around the vertical plane with a 10° step graduated gauge and fitted with mechanical blocks that guarantee stable aiming of the beam of light. Horizontal aiming is performed using the slots in the base, which allow an ±30° adjustment. High visual comfort. Polymer optic lenses offering high yield and even light distribution. Complete with circuit fitted with Neutral White monochrome power LEDs. Extractable control gear connected with quick-coupling connectors. 220-240V ac 50/60Hz DALI electronic ballast. Replaceable control gear. All the screws used are made of A2 stainless steel.

Installation

The luminaire can be installed at ground level or on walls using the standard base.

Colour

Grey (15)

Mounting

wall arm|wall surface|ground anchored

Wiring

Luminaire ready for pass-through wiring. Product perfect watertightness at the power cable entry point is guaranteed by 2 nickel-plated brass M24x1.5 cable clamps, suitable for cables with a max external 16mm ø (1.5mm² cross section). Push in terminal board.

Notes

Available accessories include: a refractor for elliptical light flow distribution, diffusing glass, visor, directional flaps, protective grille .


Complies with EN60598-1 and pertinent regulations




Technical data

Im system:	7449	Colour temperature [K]:	4000
W system:	84	MacAdam Step:	2
Im source:	9550	Life Time LED 1:	58,000h - L80 - B10 (Ta 25°C)
W source:	77	Lamp code:	LED
Luminous efficiency (Im/W, real value):	88.7	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	78	Intervallo temperatura ambiente:	from -30°C to 50°C.
Beam angle [°]:	4°	Control:	DALI
CRI (minimum):	80		

Polar

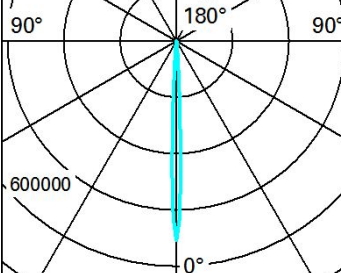Imax=531237 cd		Lux			
		h	d	Em	Emax
$\alpha = 4^\circ$		50	3.5	172	212
		100	7	43	53
		150	10.5	19	24
		200	14	11	13

Isolux

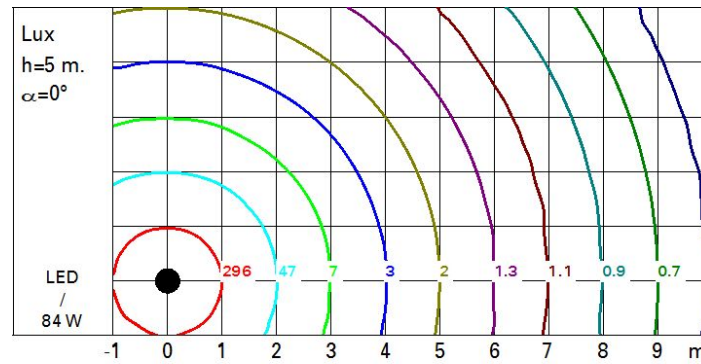

UGR diagram

Corrected UGR values (at 9550 lm bare lamp luminous flux)												
Reflect.:		viewed crosswise					viewed endwise					
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30	
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30	
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim		viewed crosswise					viewed endwise					
x	y											
2H	2H	11.2	13.2	11.5	13.5	13.8	11.2	13.2	11.5	13.5	13.8	
	3H	11.6	12.8	12.0	13.1	13.4	11.7	12.9	12.1	13.2	13.5	
	4H	11.7	12.5	12.0	12.8	13.1	11.8	12.6	12.2	12.9	13.3	
	6H	11.7	12.2	12.0	12.5	12.8	11.8	12.3	12.2	12.7	13.0	
	8H	11.6	12.2	12.0	12.6	12.9	11.7	12.4	12.1	12.7	13.1	
	12H	11.5	12.3	11.9	12.7	13.0	11.6	12.5	12.0	12.8	13.2	
4H	2H	11.8	12.6	12.2	12.9	13.3	11.7	12.5	12.0	12.8	13.1	
	3H	12.2	13.0	12.6	13.4	13.7	12.1	12.9	12.5	13.3	13.7	
	4H	12.0	13.3	12.4	13.7	14.1	12.0	13.3	12.4	13.7	14.1	
	6H	11.7	13.5	12.2	14.0	14.5	11.7	13.6	12.2	14.0	14.5	
	8H	11.6	13.5	12.1	14.0	14.5	11.6	13.6	12.1	14.0	14.5	
	12H	11.5	13.4	12.0	13.9	14.4	11.6	13.4	12.1	13.9	14.4	
8H	4H	11.6	13.6	12.1	14.0	14.5	11.6	13.5	12.1	14.0	14.5	
	6H	11.6	13.2	12.1	13.7	14.2	11.6	13.2	12.1	13.7	14.2	
	8H	11.7	12.8	12.2	13.3	13.8	11.7	12.8	12.2	13.3	13.8	
	12H	11.9	12.4	12.4	12.9	13.5	11.9	12.4	12.4	12.9	13.5	
12H	4H	11.6	13.4	12.1	13.9	14.4	11.5	13.4	12.0	13.9	14.4	
	6H	11.7	12.8	12.2	13.3	13.8	11.7	12.8	12.2	13.3	13.8	
	8H	11.9	12.4	12.4	12.9	13.5	11.9	12.4	12.4	12.9	13.5	
Variations with the observer position at spacing:												
S =		1.0H	1.0 / -1.0				1.0 / -1.0					
		1.5H	2.1 / -2.1				2.1 / -2.1					
		2.0H	2.7 / -3.9				2.7 / -3.9					