


Last information update: March 2025

**Product configuration: 003A.01**

003A.01: SIPARIO Ø56 spotlight - DALI - WideFlood - OBLens - - 15W 977.9lm - 2700K - CRI 90 - White

**Product code**

003A.01: SIPARIO Ø56 spotlight - DALI - WideFlood - OBLens - - 15W 977.9lm - 2700K - CRI 90 - White

**Technical description**

Ø56 adjustable spotlight with adapter for installation on an electrified track. LED lamp with C.O.B. (Chip on board) technology, - CRI90- high colour rendering and 2700K tone.

Die-cast aluminium body with thermoplastic rear cap and front ring (Mass-Balance). The product can be rotated by 360° around the vertical axis with a mechanical lock and tilted by 90° relative to the horizontal plane. Passive heat dissipation.

OptiBeam Lens optical system with WideFlood optic.

Dimmable electronic DALI-2 power supply integrated in adapter.

Spotlight with Push&Go system designed to facilitate and safely accelerate the connection between product and optic accessory.

Mechanically disconnecting the accessory allows it to be disengaged but not dropped. Three internal accessories and one external one can be used simultaneously. All internal accessories rotate 360° about the spotlight longitudinal axis.

**Installation**

Mains voltage track.

**Colour**

White (01)

**Weight (Kg)**

0.47

**Mounting**

three circuit track

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	978	MacAdam Step:	2
W system:	15	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
lm source:	1270	Lamp code:	LED
W source:	13	Number of lamps for optical assembly:	1
Luminous efficiency (lm/W, real value):	65.2	ZVEI Code:	LED
lm in emergency mode:	-	Number of optical assemblies:	1
Total light flux at or above an angle of 90° [Lm]:	0	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	77	Inrush current:	5 A / 50 µs
Beam angle [°]:	46°	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 31 luminaires B16A: 50 luminaires C10A: 52 luminaires C16A: 85 luminaires
CRI (minimum):	90	Overvoltage protection:	4kV Common mode & 2kV Differential mode
Colour temperature [K]:	2700	Control:	DALI-2


**Polar**

<p>Imax=1548 cd</p> <p>90° 180° 90°</p> <p>1500</p> <p>0°</p> <p>α=46°</p>	<p><b>CIE</b> nL 0.77 95-100-100-100-77 UGR 19.8-19.8</p> <p><b>DIN</b> A.61</p> <p><b>UTE</b> 0.77A+0.00T F*1=951 F*1+F*2=997 F*1+F*2+F*3=1000</p>	<b>Lux</b>			
		h	d	Em	Emax
		1	0.9	1191	1548
		2	1.7	298	387
		3	2.6	132	172
4	3.4	74	97		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	68	64	61	59	63	61	60	58	75
1.0	71	68	65	63	67	64	64	61	80
1.5	75	73	70	69	72	70	69	67	86
2.0	78	76	74	73	75	73	73	70	91
2.5	79	78	77	76	77	76	75	73	94
3.0	80	79	78	77	78	77	76	74	96
4.0	81	81	80	79	79	79	78	76	98
5.0	82	81	81	80	80	80	78	76	99

Luminance curve limit

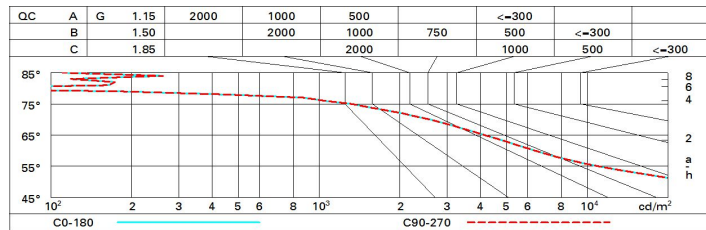

UGR diagram

Corrected UGR values (at 1270 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling	cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	20.3	20.9	20.6	21.2	21.4	20.3	20.9	20.6	21.2	21.4
	3H	20.2	20.8	20.5	21.0	21.3	20.2	20.8	20.5	21.0	21.3
	4H	20.1	20.6	20.5	20.9	21.2	20.1	20.7	20.5	20.9	21.2
	6H	20.1	20.5	20.4	20.8	21.2	20.1	20.5	20.4	20.8	21.2
	8H	20.0	20.5	20.4	20.8	21.1	20.0	20.5	20.4	20.8	21.1
12H	20.0	20.4	20.4	20.8	21.1	20.0	20.4	20.4	20.8	21.1	
4H	2H	20.1	20.7	20.5	20.9	21.2	20.1	20.6	20.5	20.9	21.2
	3H	20.0	20.4	20.4	20.8	21.1	20.0	20.4	20.4	20.8	21.1
	4H	19.9	20.3	20.3	20.7	21.1	19.9	20.3	20.3	20.7	21.1
	6H	19.8	20.2	20.3	20.6	21.0	19.8	20.2	20.3	20.6	21.0
	8H	19.8	20.1	20.2	20.5	20.9	19.8	20.1	20.2	20.5	20.9
12H	19.7	20.0	20.2	20.4	20.9	19.7	20.0	20.2	20.4	20.9	
8H	4H	19.8	20.1	20.2	20.5	20.9	19.8	20.1	20.2	20.5	20.9
	6H	19.7	19.9	20.2	20.4	20.9	19.7	19.9	20.2	20.4	20.9
	8H	19.6	19.9	20.1	20.3	20.8	19.6	19.9	20.1	20.3	20.8
	12H	19.6	19.8	20.1	20.3	20.8	19.6	19.8	20.1	20.3	20.8
12H	4H	19.7	20.0	20.2	20.4	20.9	19.7	20.0	20.2	20.4	20.9
	6H	19.6	19.9	20.1	20.3	20.8	19.6	19.9	20.1	20.3	20.8
	8H	19.6	19.8	20.1	20.3	20.8	19.6	19.8	20.1	20.3	20.8
Variations with the observer position at spacing:											
S =	1.0H	4.3 / -9.5					4.3 / -9.5				
	1.5H	7.0 / -13.0					7.0 / -13.0				
	2.0H	9.0 / -15.0					9.0 / -15.0				