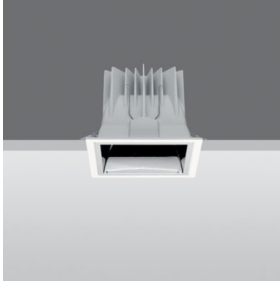


Last information update: May 2024

**Product configuration: MC03**

MC03: Square recessed luminaire - 144x144 mm H=111 mm - LED warm white - DALI ballast - general light optic with controlled luminance UGR&lt;19

**Product code**MC03: Square recessed luminaire - 144x144 mm H=111 mm - LED warm white - DALI ballast - general light optic with controlled luminance UGR<19 **Attention! Code no longer in production****Technical description**

Recessed fixed square luminaire designed to use a LED lamp. Version with rim for surface-mounting. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. Die-cast aluminium body and passive dissipation system. Product complete with 1100 lm DALI LED unit in a warm white tone 3000K and driver separate from the luminaire. General light distribution, with controlled luminance (UGR<19).

**Installation**

Recessed using torsion springs which allow easy installation in false ceilings with thickness ranging from 1 mm to 20 mm.

**Colour**

White / Aluminium (39)

**Weight (Kg)**

1

**Mounting**

ceiling recessed

**Wiring**

Product complete with DALI electronic components

Complies with EN60598-1 and pertinent regulations




IP23

IP54

On the visible part of the product once installed




pending

**Technical data**

lm system:	967	Colour temperature [K]:	3000
W system:	8.9	MacAdam Step:	3
lm source:	1100	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
W source:	6.7	Lamp code:	LED
Luminous efficiency (lm/W, real value):	108.7	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	88	Control:	DALI
CRI (minimum):	80		


**Polar**

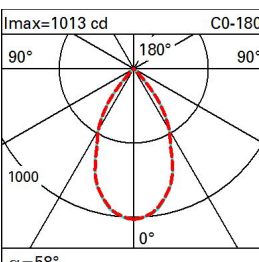		<b>Imax=1013 cd</b> <b>C0-180</b> <b>CIE</b> nL 0.88 93-100-100-100-88 UGR 16.6-16.6 <b>DIN</b> A.61 <b>UTE</b> 0.88A+0.00T F*1=930 F*1+F*2=999 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<1500 cd/m <sup>2</sup> at 65° UGR<19   L<1500 cd/mq @65°		<b>Lux</b> <table><tr><th>h</th><th>d1</th><th>d2</th><th>Em</th><th>E<sub>max</sub></th></tr><tr><td>1</td><td>1.1</td><td>1.1</td><td>742</td><td>1013</td></tr><tr><td>2</td><td>2.2</td><td>2.2</td><td>185</td><td>253</td></tr><tr><td>3</td><td>3.3</td><td>3.3</td><td>82</td><td>113</td></tr><tr><td>4</td><td>4.4</td><td>4.4</td><td>46</td><td>63</td></tr></table>					h	d1	d2	Em	E <sub>max</sub>	1	1.1	1.1	742	1013	2	2.2	2.2	185	253	3	3.3	3.3	82	113	4	4.4	4.4	46	63
h	d1	d2	Em	E <sub>max</sub>																													
1	1.1	1.1	742	1013																													
2	2.2	2.2	185	253																													
3	3.3	3.3	82	113																													
4	4.4	4.4	46	63																													

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	77	72	69	66	71	68	68	64	73
1.0	81	76	73	71	75	73	72	69	79
1.5	86	82	80	78	81	79	78	75	86
2.0	89	86	84	83	85	83	82	80	91
2.5	90	89	87	86	87	86	85	82	94
3.0	92	90	89	88	89	88	87	84	96
4.0	93	92	91	90	90	89	88	86	98
5.0	93	93	92	91	91	90	89	87	99

# Luminance curve limit

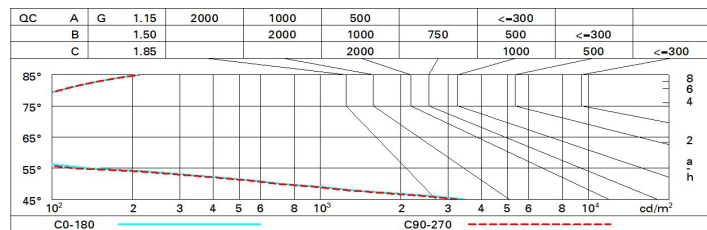

# UGR diagram

Corrected UGR values (at 1100 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.2	17.8	17.4	18.0	18.3	17.2	17.8	17.4	18.0	18.3
	3H	17.0	17.6	17.3	17.9	18.1	17.0	17.6	17.3	17.9	18.1
	4H	17.0	17.5	17.3	17.8	18.1	16.9	17.5	17.3	17.8	18.1
	6H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	8H	16.8	17.3	17.2	17.6	18.0	16.8	17.3	17.2	17.6	18.0
	12H	16.8	17.2	17.2	17.6	17.9	16.8	17.2	17.2	17.6	17.9
4H	2H	17.0	17.5	17.3	17.8	18.1	16.9	17.5	17.3	17.8	18.1
	3H	16.8	17.2	17.2	17.6	17.9	16.8	17.2	17.2	17.6	17.9
	4H	16.7	17.1	17.1	17.5	17.9	16.7	17.1	17.1	17.5	17.8
	6H	16.6	17.0	17.1	17.4	17.8	16.6	17.0	17.0	17.4	17.8
	8H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	12H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
8H	4H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	6H	16.5	16.7	17.0	17.2	17.7	16.5	16.7	16.9	17.2	17.7
	8H	16.4	16.7	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	12H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.0	17.6
12H	4H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	6H	16.4	16.7	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	8H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.0	17.6
Variations with the observer position at spacing:											
S =	1.0H	4.5 / -23.0					4.6 / -23.1				
	1.5H	6.1 / -24.6					6.2 / -24.6				
	2.0H	8.1 / -24.8					8.2 / -24.8				