


Last information update: February 2025

**Product configuration: QU50**

QU50: Ø 234 mm - warm white - dali

**Product code**

QU50: Ø 234 mm - warm white - dali

**Technical description**

A round luminaire that can be surface or pendant-mounted using a kit to be ordered separately. The product is designed to use LED lamps with C.o.B. technology. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. The product is fitted with a passive dissipation system. Luminaire complete with LED lamp in warm white colour tone (3000K). General lighting beam.

**Installation**

surface or pendant-mounted using a kit to be ordered as an accessory.

**Colour**

White / Aluminium (39) | Black / Aluminium (40)

**Weight (Kg)**

1.76

**Mounting**

ceiling surface

**Wiring**

product complete with dali components

Complies with EN60598-1 and pertinent regulations



IP40




pending

**Technical data**

lm system:	3960	Colour temperature [K]:	3000
W system:	36.7	MacAdam Step:	2
lm source:	4400	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W source:	32	Lamp code:	LED
Luminous efficiency (lm/W, real value):	107.9	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	90	Control:	DALI-2
CRI (minimum):	90		


**Polar**

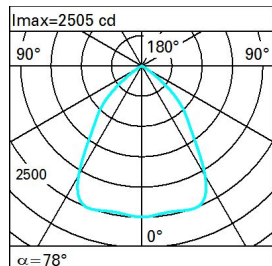 Imax=2505 cd α=78°	<b>CIE</b> nL 0.90 79-99-100-100-90 UGR 21.0-21.0 <b>DIN</b> A 61 <b>UTE</b> 0.90B+0.00T F*1=792 F*1+F*2=994 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L<3000 cd/m² at 65°				<b>Lux</b>			
	h	d	Em	Emax	h	d	Em	Emax
	2	3.2	462	623				
	4	6.5	115	156				
	6	9.7	51	69				
	8	13	29	39				

# Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	73	66	62	58	65	61	61	57	63
1.0	78	72	68	65	71	67	67	63	70
1.5	85	80	77	74	79	76	75	72	80
2.0	88	85	83	80	84	82	80	77	86
2.5	90	88	86	84	87	85	84	80	89
3.0	92	90	88	87	88	87	86	83	92
4.0	93	92	90	89	90	89	88	85	94
5.0	94	93	92	91	91	90	89	86	95

# Luminance curve limit

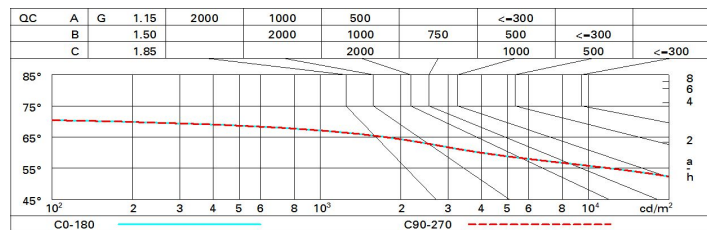

# UGR diagram

Corrected UGR values (at 4400 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
2H	2H	21.5	22.3	21.8	22.0	22.8	21.5	22.3	21.8	22.0	22.8
	3H	21.4	22.1	21.7	22.4	22.7	21.4	22.1	21.8	22.4	22.7
	4H	21.3	22.0	21.6	22.3	22.6	21.4	22.0	21.7	22.3	22.6
	6H	21.2	21.8	21.6	22.2	22.5	21.3	21.9	21.6	22.2	22.5
	8H	21.2	21.8	21.6	22.1	22.5	21.2	21.8	21.6	22.2	22.5
	12H	21.2	21.7	21.5	22.1	22.4	21.2	21.8	21.6	22.1	22.5
4H	2H	21.4	22.0	21.7	22.3	22.6	21.3	22.0	21.6	22.3	22.6
	3H	21.2	21.8	21.6	22.1	22.5	21.2	21.8	21.6	22.1	22.5
	4H	21.1	21.6	21.5	22.0	22.4	21.1	21.6	21.5	22.0	22.4
	6H	21.0	21.5	21.5	21.9	22.3	21.0	21.5	21.5	21.9	22.3
	8H	21.0	21.4	21.4	21.8	22.2	21.0	21.4	21.4	21.8	22.2
	12H	20.9	21.3	21.4	21.7	22.2	20.9	21.3	21.4	21.7	22.2
8H	4H	21.0	21.4	21.4	21.8	22.2	21.0	21.4	21.4	21.8	22.2
	6H	20.9	21.2	21.4	21.7	22.1	20.9	21.2	21.4	21.7	22.1
	8H	20.9	21.1	21.3	21.6	22.1	20.9	21.1	21.3	21.6	22.1
	12H	20.8	21.0	21.3	21.5	22.0	20.8	21.0	21.3	21.5	22.0
12H	4H	20.9	21.3	21.4	21.7	22.2	20.9	21.3	21.4	21.7	22.2
	6H	20.9	21.1	21.3	21.6	22.1	20.9	21.1	21.3	21.6	22.1
	8H	20.8	21.0	21.3	21.5	22.0	20.8	21.0	21.3	21.5	22.0
Variations with the observer position at spacing:											
S =		1.0H					1.6 / -5.3				
		1.5H					3.4 / -13.7				
		2.0H					5.4 / -22.1				