


Polar

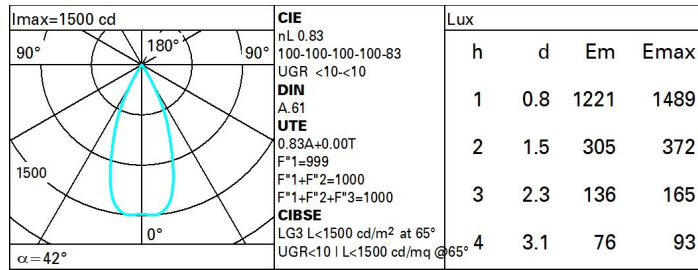

Coefficientes de uso

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	80	77	76	79	77	76	74	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	87	85	83	100

Curva límite de luminancia

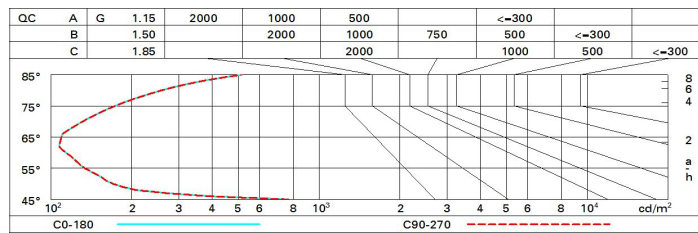


Diagrama UGR

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.:		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	7.1	7.6	7.4	7.8	8.0	7.1	7.6	7.4	7.8	8.0
	3H	7.0	7.4	7.3	7.7	7.9	7.0	7.4	7.3	7.7	7.9
	4H	6.9	7.3	7.2	7.6	7.9	6.9	7.3	7.2	7.6	7.9
	6H	6.8	7.2	7.2	7.5	7.8	6.8	7.2	7.2	7.5	7.8
	8H	6.8	7.2	7.2	7.5	7.8	6.8	7.2	7.2	7.5	7.8
	12H	6.8	7.1	7.1	7.4	7.8	6.8	7.1	7.1	7.4	7.8
4H	2H	6.9	7.3	7.2	7.6	7.9	6.9	7.3	7.2	7.6	7.9
	3H	6.8	7.1	7.1	7.4	7.8	6.8	7.1	7.1	7.4	7.8
	4H	6.7	7.0	7.1	7.3	7.7	6.7	7.0	7.1	7.3	7.7
	6H	6.6	6.9	7.0	7.2	7.7	6.6	6.8	7.0	7.2	7.7
	8H	6.5	6.8	7.0	7.2	7.6	6.5	6.8	7.0	7.2	7.6
	12H	6.5	6.7	7.0	7.2	7.6	6.5	6.7	6.9	7.1	7.6
8H	4H	6.5	6.8	7.0	7.2	7.6	6.5	6.8	7.0	7.2	7.6
	6H	6.4	6.6	6.9	7.1	7.6	6.5	6.7	6.9	7.1	7.6
	8H	6.4	6.6	6.9	7.0	7.5	6.4	6.6	6.9	7.0	7.5
	12H	6.4	6.5	6.9	7.0	7.5	6.3	6.5	6.8	7.0	7.5
12H	4H	6.5	6.7	6.9	7.1	7.6	6.5	6.7	7.0	7.2	7.6
	6H	6.4	6.6	6.9	7.0	7.5	6.4	6.6	6.9	7.0	7.5
	8H	6.3	6.5	6.8	7.0	7.5	6.4	6.5	6.9	7.0	7.5
Variations with the observer position at spacing:											
S =	1.0H	7.0 / -14.5					7.0 / -14.5				
	1.5H	9.8 / -14.7					9.8 / -14.7				
	2.0H	11.8 / -14.8					11.8 / -14.8				