

Laser Blade XS


Design iGuzzini

iGuzzini

Last information update: June 2025

Product configuration: Q778

Q778: Frame 5 cells - Medium beam - Tunable White - LED



Product code

Q778: Frame 5 cells - Medium beam - Tunable White - LED

Technical description

Linear 5 optic element recessed miniaturised luminaire. Using LED lamps with a high colour rendering index and a different colour temperature allows dynamic light modulation to be obtained. The variation is achieved by mixing an emission of 3 x 2700K LEDs and 2 x 5700K LEDs. Despite the disparity of lamps that use extreme channels - 2700K and 5700K - the intensity of the flux emitted remains the same. Moreover, even when products of different sizes are used, the colour temperature remains constant and uniform. Main body with die-cast aluminium radiant surface, version with perimeter surface frame. Metallised, thermoplastic, high definition Opti Beam reflectors, integrated in a set-back position in the anti-glare screen. The product is designed to be used together with code 6170 to obtain a solution suitable for small to medium systems that can be programmed with a DALI protocol via a simple and intuitive user touch-panel. Other management systems are also available with a separate code for larger systems that require the intervention of a specialised technician to programme them: the MH97 + MH93 + MI02 group offers a DALI / KNX programmable solution, and the MH97 + MH93 + M618 group allows the system management to be extended to remote devices like tablet and smartphones too.

Installation

Recessed with steel wire springs for false ceilings from 1 to 25 mm thick - preparation hole 24 x 96.

Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)* | Grey / Black (74)* | White / burnished chrome (E7)*

Weight (Kg)

0.48

* Colours on request

Mounting

wall recessed|ceiling recessed

Wiring

DALI control gear units included. Different management systems available with separate code. For technical details, properties and connection procedures see the instruction sheet.

Complies with EN60598-1 and pertinent regulations



IP20



pending

Technical data

lm system:	695	CRI (minimum):	90
W system:	12.8	Colour temperature [K]:	Tunable white 2700 - 5700
lm source:	880	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
W source:	8.6	Lamp code:	LED
Luminous efficiency (lm/W, real value):	54.3	Number of lamps for optical assembly:	1
lm in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	79	Control:	DALI-2
Beam angle [°]:	25°		


Polar

Imax=3212 cd		CIE		Lux			
		nL 0.79		h	d	Em	Emax
		100-100-100-100-79		2	0.9	667	803
		UGR <10-10		4	1.7	167	201
		DIN		6	2.6	74	89
		A.61		8	3.4	42	50
		UTE					
		0.79A+0.00T					
		F*1=999					
		F*1+F*2=1000					
		F*1+F*2+F*3=1000					
		CIBSE					
		LG3 L<1500 cd/m² at 65°					
		UGR<10 L<1500 cd/mq @65°					
α=24°							

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	71	68	65	63	67	65	64	62	78
1.0	75	71	69	67	70	68	68	66	83
1.5	78	76	74	72	75	73	72	70	89
2.0	81	79	77	76	78	76	76	73	93
2.5	82	81	80	79	80	79	78	76	96
3.0	83	82	81	81	81	80	79	77	98
4.0	84	83	83	82	82	82	80	79	99
5.0	84	84	84	83	83	82	81	79	100

Luminance curve limit

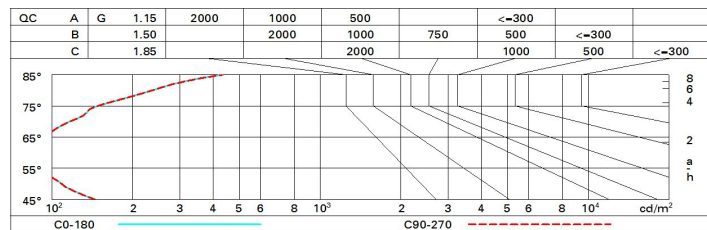

UGR diagram

Corrected UGR values (at 800 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20	0.70 0.50 0.20	0.70 0.30 0.20	0.50 0.50 0.20	0.50 0.30 0.20	0.30 0.30 0.20
viewed crosswise						viewed endwise					
2H	2H	2.9	5.0	3.3	5.4	5.7	2.9	5.0	3.3	5.4	5.7
	3H	2.8	4.4	3.1	4.7	5.1	2.8	4.4	3.1	4.7	5.0
	4H	2.7	4.1	3.1	4.4	4.7	2.7	4.0	3.1	4.4	4.7
	6H	2.7	3.7	3.1	4.0	4.4	2.7	3.7	3.1	4.0	4.4
	8H	2.6	3.7	3.0	4.0	4.4	2.6	3.6	3.0	4.0	4.4
12H	2.6	3.6	3.0	4.0	4.4	2.6	3.6	3.0	4.0	4.3	
4H	2H	2.7	4.0	3.1	4.4	4.7	2.7	4.1	3.1	4.4	4.7
	3H	2.6	3.6	3.0	4.0	4.3	2.6	3.6	3.0	4.0	4.3
	4H	2.5	3.5	2.9	3.9	4.3	2.5	3.5	2.9	3.9	4.3
	6H	2.1	3.8	2.6	4.2	4.7	2.1	3.8	2.6	4.2	4.7
	8H	2.0	3.9	2.5	4.3	4.8	2.0	3.9	2.5	4.3	4.8
12H	1.9	3.9	2.4	4.4	4.9	1.9	3.8	2.4	4.3	4.8	
8H	4H	2.0	3.9	2.5	4.3	4.8	2.0	3.9	2.5	4.3	4.8
	6H	1.9	3.7	2.4	4.2	4.7	1.9	3.7	2.4	4.2	4.7
	8H	1.9	3.5	2.4	4.0	4.5	1.9	3.5	2.4	4.0	4.5
	12H	2.1	3.1	2.6	3.6	4.1	2.0	3.0	2.6	3.5	4.1
12H	4H	1.9	3.8	2.4	4.3	4.8	1.9	3.9	2.4	4.4	4.9
	6H	1.9	3.4	2.4	3.9	4.5	1.9	3.5	2.4	4.0	4.5
	8H	2.0	3.0	2.6	3.5	4.1	2.1	3.1	2.6	3.6	4.1
Variations with the observer position at spacing:											
S =	1.0H	6.9 / -11.5					6.9 / -11.5				
	1.5H	9.7 / -11.7					9.7 / -11.7				
	2.0H	11.7 / -11.8					11.7 / -11.8				