

Last information update: May 2024

Product configuration: N376


N376: extractable, adjustable, recessed LED luminaire - electronic control gear included

**Product code**N376: extractable, adjustable, recessed LED luminaire - electronic control gear included **Attention! Code no longer in production****Technical description**

Extractable, adjustable, recessed luminaire for neutral white LED lamp. Passive heat dispersion system. Die-cast aluminium main body and frame; stainless steel rotation hinge. Rotation ring with safety cover in a high resistance thermoplastic material. Body adjusted with a manual manoeuvre device; internal 40° - external 65° - rotation on 355° axis. Reflector with high efficiency super-pure aluminium optic - flood beam angle. Die-cast aluminium lamp body closure ring. Tempered transparent glass screen. Electronic control gear supplied and connected to the luminaire.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 125 mm

**Colour**

White (01)

Weight (Kg)

0.85

Mounting

ceiling recessed

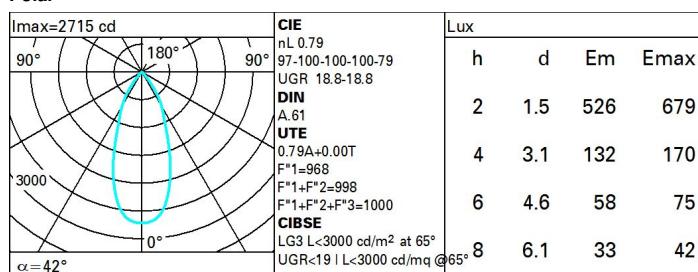
Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**

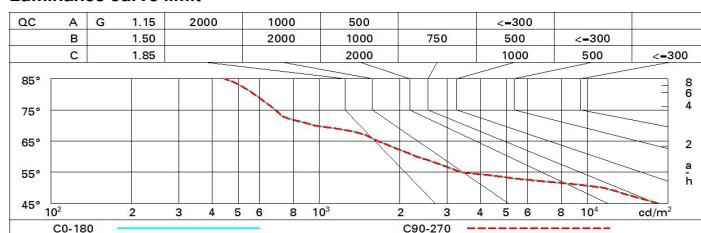
Im system:	1578	CRI (minimum):	80
W system:	15.4	Colour temperature [K]:	4000
Im source:	2000	MacAdam Step:	2
W source:	12	Life Time LED 1:	50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (Im/W, real value):	102.5	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	1
Beam angle [°]:	42°		

Polar

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	64	61	66	63	63	60	76
1.0	73	70	67	66	69	67	67	64	81
1.5	77	75	73	71	74	72	71	69	87
2.0	80	78	77	75	77	76	75	72	92
2.5	82	80	79	78	79	78	77	75	95
3.0	83	82	81	80	80	79	78	76	97
4.0	84	83	82	82	81	81	80	78	99
5.0	84	84	83	83	82	82	80	79	100

Luminance curve limit



UGR diagram

Corrected UGR values (at 2000 lm bare lamp luminous flux)										
Reflect.:		viewed crosswise					viewed endwise			
ceil/cav	0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	
walls	0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	
work pl.	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
Room dim										
X Y	viewed crosswise					viewed endwise				
2H 2H	19.4	20.1	19.7	20.3	20.5	19.4	20.1	19.7	20.3	20.5
3H	19.2	19.8	19.6	20.1	20.4	19.2	19.8	19.6	20.1	20.4
4H	19.2	19.7	19.5	20.0	20.3	19.2	19.7	19.5	20.0	20.3
6H	19.1	19.6	19.4	19.9	20.3	19.1	19.6	19.4	19.9	20.3
8H	19.1	19.6	19.4	19.9	20.2	19.1	19.6	19.4	19.9	20.2
12H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.8	20.2
4H 2H	19.2	19.7	19.5	20.0	20.3	19.2	19.7	19.5	20.0	20.3
3H	19.0	19.5	19.4	19.8	20.2	19.0	19.5	19.4	19.8	20.2
4H	18.9	19.4	19.3	19.7	20.1	18.9	19.4	19.3	19.7	20.1
6H	18.9	19.2	19.3	19.6	20.0	18.9	19.2	19.3	19.6	20.0
8H	18.8	19.1	19.3	19.6	20.0	18.8	19.1	19.2	19.6	20.0
12H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
8H 4H	18.8	19.1	19.2	19.6	20.0	18.8	19.1	19.3	19.6	20.0
6H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9
8H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
12H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
12H 4H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9
6H	18.7	18.9	19.2	19.4	19.9	18.7	18.9	19.2	19.4	19.9
8H	18.6	18.8	19.1	19.3	19.8	18.6	18.8	19.1	19.3	19.8
Variations with the observer position at spacing:										
S =	1.0H	5.1 / -14.3				5.1 / -14.3				
	1.5H	7.9 / -16.4				7.9 / -16.4				
	2.0H	9.9 / -17.8				9.9 / -17.8				