

Last information update: February 2025

Product configuration: QU20

QU20: Ø 114 mm - neutral - dali



Product code

QU20: Ø 114 mm - neutral - dali

Technical description

A round luminaire that can be surface or pendant-mounted using a kit to be ordered separately. The product is designed to use LED lamps with C.o.B. technology. Reflector vacuum-metallised with aluminium vapours with an anti-scratch protective layer. The product is fitted with a passive dissipation system. Luminaire complete with LED lamp in neutral colour tone (4000K). General lighting beam.

Installation

surface or pendant-mounted using a kit to be ordered as an accessory.

Colour

White / Aluminium (39) | Black / Aluminium (40)

Weight (Kg)

0.59

Mounting

ceiling surface

Wiring

product complete with dali components


Complies with EN60598-1 and pertinent regulations



Technical data

| | | | |
|--|-------|--|--|
| lm system: | 1573 | Life Time LED 1: | > 50,000h - L90 - B10 (Ta 25°C) |
| W system: | 13.2 | Lamp code: | LED |
| lm source: | 1850 | Number of lamps for optical assembly: | 1 |
| W source: | 11 | ZVEI Code: | LED |
| Luminous efficiency (lm/W, real value): | 119.1 | Number of optical assemblies: | 1 |
| lm in emergency mode: | - | Power factor: | See installation instructions |
| Total light flux at or above an angle of 90° [Lm]: | 0 | Inrush current: | 18 A / 250 µs |
| Light Output Ratio (L.O.R.) [%]: | 85 | Maximum number of luminaires of this type per miniature circuit breaker: | B10A: 21 luminaires B16A: 34 luminaires C10A: 35 luminaires C16A: 57 luminaires |
| CRI (minimum): | 80 | Minimum dimming %: | 1 |
| Colour temperature [K]: | 4000 | Overvoltage protection: | 2kV Common mode & 1kV Differential mode |
| MacAdam Step: | 2 | Control: | DALI-2 |


Polar

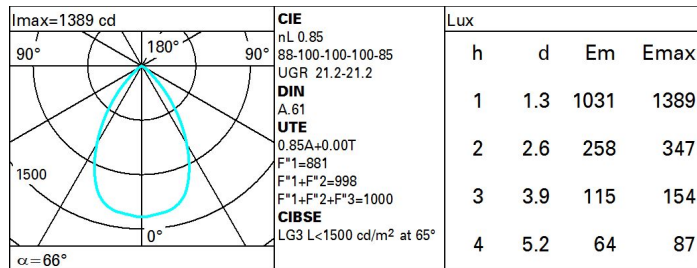

Utilisation factors

| | | | | | | | | | |
|------|----|----|----|----|----|----|----|----|-----|
| R | 77 | 75 | 73 | 71 | 55 | 53 | 33 | 00 | DRR |
| K0.8 | 72 | 67 | 63 | 61 | 66 | 63 | 62 | 59 | 70 |
| 1.0 | 76 | 72 | 68 | 66 | 71 | 68 | 67 | 64 | 75 |
| 1.5 | 82 | 78 | 76 | 73 | 77 | 75 | 74 | 71 | 84 |
| 2.0 | 85 | 82 | 80 | 79 | 81 | 79 | 78 | 76 | 89 |
| 2.5 | 87 | 85 | 83 | 82 | 83 | 82 | 81 | 78 | 92 |
| 3.0 | 88 | 86 | 85 | 84 | 85 | 84 | 83 | 80 | 94 |
| 4.0 | 89 | 88 | 87 | 86 | 86 | 86 | 84 | 82 | 96 |
| 5.0 | 90 | 89 | 88 | 87 | 87 | 87 | 85 | 83 | 97 |

Luminance curve limit

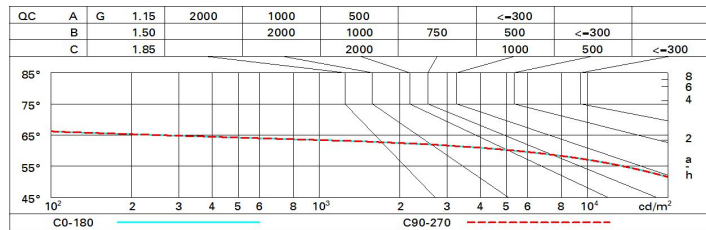

UGR diagram

| Corrected UGR values (at 1850 lm bare lamp luminous flux) | | | | | | | | | | | |
|---|------|------------------|------|------|------|------|----------------|------|------|------|------|
| Reflect.: | | viewed crosswise | | | | | viewed endwise | | | | |
| ceiling/cav | | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 | 0.70 | 0.70 | 0.50 | 0.50 | 0.30 |
| walls | | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 | 0.50 | 0.30 | 0.50 | 0.30 | 0.30 |
| work pl. | | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 | 0.20 |
| Room dim | | viewed crosswise | | | | | viewed endwise | | | | |
| x | y | | | | | | | | | | |
| 2H | 2H | 21.7 | 22.4 | 22.0 | 22.7 | 22.9 | 21.7 | 22.4 | 22.0 | 22.7 | 22.9 |
| | 3H | 21.6 | 22.2 | 21.9 | 22.5 | 22.8 | 21.6 | 22.3 | 22.0 | 22.5 | 22.8 |
| | 4H | 21.5 | 22.1 | 21.9 | 22.4 | 22.7 | 21.6 | 22.1 | 21.9 | 22.4 | 22.7 |
| | 6H | 21.5 | 22.0 | 21.8 | 22.3 | 22.6 | 21.5 | 22.0 | 21.8 | 22.3 | 22.7 |
| | 8H | 21.4 | 21.9 | 21.8 | 22.3 | 22.6 | 21.4 | 22.0 | 21.8 | 22.3 | 22.6 |
| 12H | 21.4 | 21.9 | 21.8 | 22.2 | 22.6 | 21.4 | 21.9 | 21.8 | 22.2 | 22.6 | |
| 4H | 2H | 21.6 | 22.1 | 21.9 | 22.4 | 22.7 | 21.5 | 22.1 | 21.9 | 22.4 | 22.7 |
| | 3H | 21.4 | 21.9 | 21.8 | 22.2 | 22.6 | 21.4 | 21.9 | 21.8 | 22.2 | 22.6 |
| | 4H | 21.3 | 21.7 | 21.7 | 22.1 | 22.5 | 21.3 | 21.7 | 21.7 | 22.1 | 22.5 |
| | 6H | 21.2 | 21.6 | 21.7 | 22.0 | 22.4 | 21.2 | 21.6 | 21.7 | 22.0 | 22.4 |
| | 8H | 21.2 | 21.5 | 21.6 | 21.9 | 22.4 | 21.2 | 21.5 | 21.6 | 21.9 | 22.4 |
| 12H | 21.1 | 21.4 | 21.6 | 21.9 | 22.3 | 21.1 | 21.4 | 21.6 | 21.9 | 22.3 | |
| 8H | 4H | 21.2 | 21.5 | 21.6 | 21.9 | 22.4 | 21.2 | 21.5 | 21.6 | 21.9 | 22.4 |
| | 6H | 21.1 | 21.4 | 21.6 | 21.8 | 22.3 | 21.1 | 21.4 | 21.6 | 21.8 | 22.3 |
| | 8H | 21.0 | 21.3 | 21.5 | 21.7 | 22.2 | 21.0 | 21.3 | 21.5 | 21.7 | 22.2 |
| | 12H | 21.0 | 21.2 | 21.5 | 21.7 | 22.2 | 21.0 | 21.2 | 21.5 | 21.7 | 22.2 |
| 12H | 4H | 21.1 | 21.4 | 21.6 | 21.9 | 22.3 | 21.1 | 21.4 | 21.6 | 21.9 | 22.3 |
| | 6H | 21.0 | 21.3 | 21.5 | 21.7 | 22.2 | 21.0 | 21.3 | 21.5 | 21.7 | 22.2 |
| | 8H | 21.0 | 21.2 | 21.5 | 21.7 | 22.2 | 21.0 | 21.2 | 21.5 | 21.7 | 22.2 |

| Variations with the observer position at spacing: | | | |
|---|------|-------------|-------------|
| S = | 1.0H | 2.8 / -7.1 | 2.8 / -7.1 |
| | 1.5H | 5.4 / -21.0 | 5.4 / -21.0 |
| | 2.0H | 7.4 / -40.2 | 7.4 / -40.2 |