


Last information update: May 2024

Product configuration: BH88

BH88: Floodlight for immersion - Floodlight 6 monochrome LEDs - 700mA DC

**Product code**BH88: Floodlight for immersion - Floodlight 6 monochrome LEDs - 700mA DC **Attention! Code no longer in production****Technical description**

Monochrome floodlight for permanent immersion, IP68 5m. Adjustable about the vertical axis and relative to the horizontal plane. The luminaire is made strictly of AISI 316L stainless steel to guarantee maximum lasting reliability in pools and fountains (fresh water). Clear, transparent 6mm thick tempered closing glass. All screws used are made of stainless steel and the seals are silicone. The product is supplied with a 4m long 2x0,5NS20N power cable. The luminaire technical characteristics conform to EN60598-2-18 standards and particular requirements. IP68 - IK08. The luminaire is complete with 6 Neutral White LEDs (6x1,2W). Optical assembly opening is not required for its installation. Insulation class III. The luminaire must be powered by a 700mA DC external driver.

Colour

Steel (13)

Mounting

wall recessed/ground recessed

Notes

Permanent immersion

Complies with EN60598-1 and pertinent regulations



IK08

IP68


Technical data

Im system:	494	CRI (minimum):	75
W system:	6.2	Colour temperature [K]:	4000
Im source:	670	Life Time LED 1:	100,000h - L80 - B10 (Ta 25°C)
W source:	6.2	Lamp code:	LED
Luminous efficiency (Im/W, real value):	79.7	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	74	Intervallo temperatura ambiente:	from -20°C to +35°C.
Beam angle [°]:	36°	LED current [mA]:	350

Polar

Imax=963 cd		Lux			
h	d	Em	Emax		
2	1.3	186	241		
4	2.6	46	60		
6	3.9	21	27		
8	5.2	12	15		

Isolux

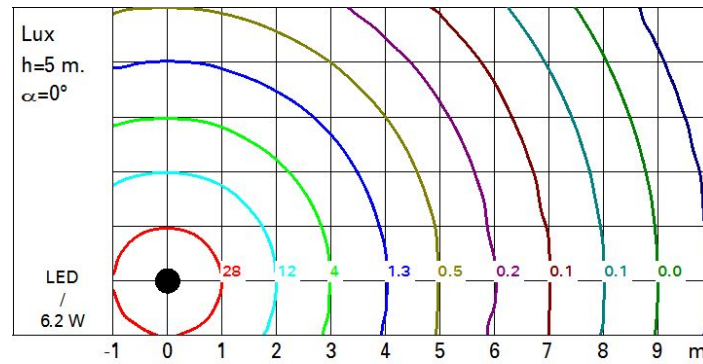

UGR diagram

Corrected UGR values (at 670 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		x					y				
2H	2H	14.6	15.3	14.9	15.5	15.8	14.6	15.3	14.9	15.5	15.8
	3H	14.7	15.3	15.0	15.6	15.9	14.6	15.2	14.9	15.5	15.8
	4H	14.7	15.3	15.1	15.6	15.9	14.6	15.2	14.9	15.4	15.8
	6H	14.7	15.3	15.1	15.6	15.9	14.5	15.1	14.9	15.4	15.7
	8H	14.7	15.2	15.1	15.6	15.9	14.5	15.0	14.8	15.3	15.7
	12H	14.7	15.2	15.1	15.5	15.9	14.4	14.9	14.8	15.3	15.6
4H	2H	14.6	15.2	14.9	15.4	15.8	14.7	15.3	15.1	15.6	15.9
	3H	14.7	15.2	15.1	15.6	15.9	14.8	15.3	15.2	15.6	16.0
	4H	14.8	15.2	15.2	15.6	16.0	14.8	15.2	15.2	15.6	16.0
	6H	14.8	15.2	15.3	15.6	16.0	14.8	15.2	15.2	15.6	16.0
	8H	14.8	15.2	15.3	15.6	16.0	14.8	15.1	15.2	15.5	16.0
	12H	14.8	15.1	15.2	15.5	16.0	14.7	15.0	15.2	15.5	15.9
8H	4H	14.8	15.1	15.2	15.5	16.0	14.8	15.2	15.3	15.6	16.0
	6H	14.8	15.1	15.3	15.5	16.0	14.8	15.1	15.3	15.6	16.0
	8H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
	12H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
12H	4H	14.7	15.0	15.2	15.5	15.9	14.8	15.1	15.2	15.5	16.0
	6H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
	8H	14.8	15.0	15.3	15.5	16.0	14.8	15.0	15.3	15.5	16.0
Variations with the observer position at spacing:											
S =		1.0H	2.5 / -2.7				2.5 / -2.7				
		1.5H	4.7 / -4.0				4.7 / -4.0				
		2.0H	6.5 / -4.6				6.5 / -4.6				