

# Laser Blade XS



Design iGuzzini

iGuzzini

Last information update: October 2024

## Product configuration: Q859

Q859: Ceiling-mounted LB XS square HC - 4 cells - Wide Flood beam - integrated driver



### Product code

Q859: Ceiling-mounted LB XS square HC - 4 cells - Wide Flood beam - integrated driver

### Technical description

Ceiling-mounted luminaire with 4 optical elements for LED lamps - fixed optics with metallised thermoplastic high definition Opti-Beam reflectors. Despite the ultracompact size of the product, the patented technology of the optic system guarantees an efficient luminous flux and a high level of controlled glare visual comfort. Extruded aluminium body - die-cast zamak technical dissipation unit - shaped steel fixing plate. ON-OFF driver integrated in luminaire body.

### Installation

Ceiling-mounted with surface fixing plate (screws and screw anchors not included) - external locking system.

### Colour

White (01) | Black / Black (43) | Black / White (47) | White/Gold (41)\* | Black/gold (44)\* | White / burnished chrome (E7)\* | Black/burnished chrome (F1)\*

### Weight (Kg)

0.41

\* Colours on request

### Mounting

ceiling surface

### Wiring

Cables supplied with quick-coupling terminals for connecting to power supply line.

Complies with EN60598-1 and pertinent regulations



### Technical data

Im system:	614	CRI (minimum):	90
W system:	10.2	Colour temperature [K]:	2700
Im source:	740	MacAdam Step:	2
W source:	8	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	60.2	Voltage [Vin]:	230
Im in emergency mode:	-	Lamp code:	LED
Total light flux at or above an angle of 90° [Lm]:	0	Number of lamps for optical assembly:	1
Light Output Ratio (L.O.R.) [%]:	83	ZVEI Code:	LED
Beam angle [°]:	58°	Number of optical assemblies:	1


### Polar

<p>Imax=783 cd 90° 180° 90° 750 0° α=58°</p>	<p><b>CIE</b> nL 0.83 100-100-100-100-83 UGR 16.4-16.4 <b>DIN</b> A.61 <b>UTE</b> 0.83A+0.00T F*1=996 F*1+F*2=1000 F*1+F*2+F*3=1000 <b>CIBSE</b> LG3 L&lt;1500 cd/m² at 65° UGR&lt;19   L&lt;1500 cd/mq @65°</p>	<b>Lux</b>			
		h	d	Em	E <sub>max</sub>
		1	1.1	622	776
		2	2.2	156	194
		3	3.3	69	86
4	4.4	39	49		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	75	71	68	66	70	68	68	65	78
1.0	78	75	72	70	74	72	71	69	83
1.5	82	79	77	76	78	77	76	73	89
2.0	85	83	81	80	82	80	79	77	93
2.5	86	85	84	83	84	83	82	79	96
3.0	87	86	85	85	85	84	83	81	98
4.0	88	87	87	86	86	86	84	82	99
5.0	89	88	88	88	87	86	85	83	100

Luminance curve limit

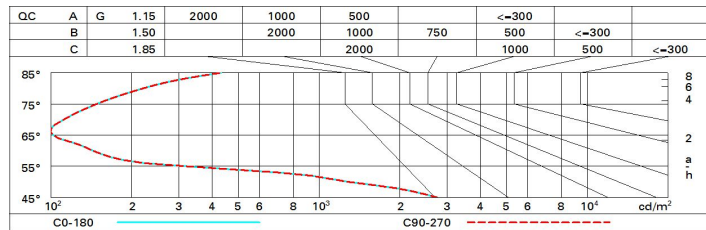

UGR diagram

Corrected UGR values (at 740 lm bare lamp luminous flux)											
Reflect.:		viewed crosswise					viewed endwise				
ceiling/cav		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
walls		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
work pl.		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
Room dim		viewed crosswise					viewed endwise				
x	y										
2H	2H	17.0	17.6	17.2	17.8	18.0	17.0	17.6	17.2	17.8	18.0
	3H	16.8	17.4	17.1	17.6	17.9	16.8	17.4	17.1	17.6	17.9
	4H	16.8	17.2	17.1	17.5	17.8	16.8	17.2	17.1	17.5	17.8
	6H	16.7	17.1	17.0	17.4	17.8	16.7	17.1	17.0	17.4	17.8
	8H	16.6	17.1	17.0	17.4	17.7	16.6	17.1	17.0	17.4	17.7
12H	16.6	17.0	17.0	17.4	17.7	16.6	17.0	17.0	17.4	17.7	
4H	2H	16.8	17.2	17.1	17.5	17.8	16.8	17.2	17.1	17.5	17.8
	3H	16.6	17.0	17.0	17.4	17.7	16.6	17.0	17.0	17.4	17.7
	4H	16.5	16.9	16.9	17.2	17.6	16.5	16.9	16.9	17.2	17.6
	6H	16.4	16.7	16.8	17.1	17.6	16.4	16.7	16.8	17.1	17.6
	8H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
12H	16.3	16.6	16.8	17.0	17.5	16.3	16.6	16.8	17.0	17.5	
8H	4H	16.4	16.7	16.8	17.1	17.5	16.4	16.7	16.8	17.1	17.5
	6H	16.3	16.5	16.7	17.0	17.4	16.3	16.5	16.7	17.0	17.4
	8H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
	12H	16.2	16.4	16.7	16.8	17.4	16.2	16.4	16.7	16.8	17.4
12H	4H	16.3	16.6	16.8	17.0	17.5	16.3	16.6	16.8	17.0	17.5
	6H	16.2	16.4	16.7	16.9	17.4	16.2	16.4	16.7	16.9	17.4
	8H	16.2	16.4	16.7	16.8	17.4	16.2	16.4	16.7	16.8	17.4
Variations with the observer position at spacing:											
S =	1.0H	6.5 / -24.9					6.5 / -24.9				
	1.5H	9.4 / -25.6					9.4 / -25.6				
	2.0H	11.4 / -25.8					11.4 / -25.8				