


Last information update: April 2024

Product configuration: MU73

MU73: extractable, adjustable, recessed LED luminaire - DALI control gear included

**Product code**

MU73: extractable, adjustable, recessed LED luminaire - DALI control gear included

Technical description

Extractable, adjustable, recessed luminaire for warm white LED lamp with high color rendering index. Passive heat dispersion system. Die-cast aluminium main body and frame; stainless steel rotation hinge. Rotation ring with safety cover in a high resistance thermoplastic material. Body adjusted with a manual manoeuvre device: internal 40° - external 65° - rotation on 355° axis. Reflector with high efficiency super-pure aluminium optic - flood beam angle. Die-cast aluminium lamp body closure ring. Tempered transparent glass screen. Dimmerable DALI control gear supplied and connected to the luminaire.

Installation

recessed using steel springs in false ceilings with thicknesses starting at 1 mm; preparation hole Ø 195 mm

Weight (Kg)

1.7

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	4399	Life Time LED 1:	> 50,000h - L90 - B10 (Ta 25°C)
W system:	42.7	Lamp code:	LED
lm source:	5370	Number of lamps for optical assembly:	1
W source:	39	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	103	Number of optical assemblies:	1
lm in emergency mode:	-	Power factor:	See installation instructions
Total light flux at or above an angle of 90° [Lm]:	0	Inrush current:	30 A / 200 µs
Light Output Ratio (L.O.R.) [%]:	82	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 12 luminaires B16A: 20 luminaires C10A: 20 luminaires C16A: 34 luminaires
Beam angle [°]:	36°	Minimum dimming %:	1
CRI (minimum):	90	Overvoltage protection:	2kV Common mode & 2kV Differential mode
Colour temperature [K]:	3000	Control:	DALI
MacAdam Step:	2		


Polar

Imax=10134 cd		CIE		Lux	
h	d	Em	Emax		
2	1.3	1973	2533		
4	2.6	493	633		
6	3.9	219	281		
8	5.2	123	158		

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	74	70	67	65	69	66	66	63	77
1.0	77	73	71	69	72	70	70	67	82
1.5	81	78	76	74	77	75	75	72	88
2.0	83	81	80	78	80	79	78	76	92
2.5	85	83	82	81	82	81	80	78	95
3.0	86	85	84	83	84	83	82	80	97
4.0	87	86	86	85	85	84	83	81	99
5.0	87	87	86	86	86	85	84	82	100

Luminance curve limit

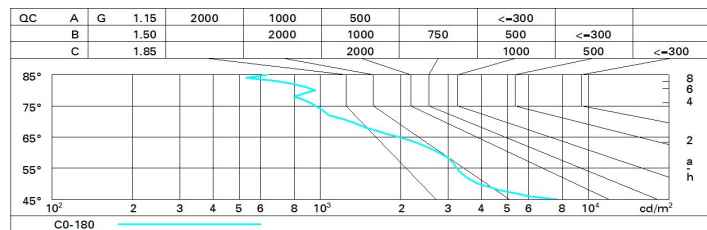

UGR diagram

Corrected UGR values (at 5370 lm bare lamp luminous flux)											
Reflect.: ceiling/cav walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.1	17.7	17.4	18.0	18.2	17.1	17.7	17.4	18.0	18.2
	3H	17.0	17.5	17.3	17.8	18.1	17.0	17.5	17.3	17.8	18.1
	4H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	6H	16.8	17.3	17.2	17.6	17.9	16.8	17.3	17.2	17.6	17.9
	8H	16.8	17.3	17.2	17.6	17.9	16.8	17.2	17.2	17.6	17.9
	12H	16.8	17.2	17.1	17.5	17.9	16.8	17.2	17.1	17.5	17.9
4H	2H	16.9	17.4	17.2	17.7	18.0	16.9	17.4	17.2	17.7	18.0
	3H	16.8	17.2	17.1	17.5	17.9	16.8	17.2	17.1	17.5	17.9
	4H	16.7	17.1	17.1	17.4	17.8	16.7	17.1	17.1	17.4	17.8
	6H	16.6	16.9	17.0	17.3	17.8	16.6	16.9	17.0	17.3	17.8
	8H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	12H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
8H	4H	16.6	16.9	17.0	17.3	17.7	16.6	16.9	17.0	17.3	17.7
	6H	16.5	16.7	16.9	17.2	17.6	16.5	16.7	16.9	17.2	17.6
	8H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	12H	16.4	16.6	16.9	17.0	17.6	16.4	16.6	16.9	17.0	17.6
12H	4H	16.5	16.8	17.0	17.2	17.7	16.5	16.8	17.0	17.2	17.7
	6H	16.4	16.6	16.9	17.1	17.6	16.4	16.6	16.9	17.1	17.6
	8H	16.4	16.6	16.9	17.0	17.6	16.4	16.6	16.9	17.0	17.6
Variations with the observer position at spacing:											
S =	1.0H	5.7 / -12.0					5.7 / -12.0				
	1.5H	8.5 / -13.0					8.5 / -13.0				
	2.0H	10.5 / -14.4					10.5 / -14.4				