

Last information update: October 2024

Product configuration: EQ75+X486.04

EQ75: Recessed luminaire Earth D=137 mm - Flush-mount stainless steel frame - Warm White - Flood optic
 X486.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black



Product code


EQ75: Recessed luminaire Earth D=137 mm - Flush-mount stainless steel frame - Warm White - Flood optic

Technical description

Recessed luminaire applicable to the floor or ground, designed for fitting monochrome white LED sources, for illumination, fixed optic, with incorporated electronic control gear. The round frame has a diameter D=137 mm; the body and frame are made of AISI 304 stainless steel with sodium-calcium extra clear glass, thickness 12mm. Stainless steel body coated with black paint. The luminaire is fixed to the outer casing by means of two TORX-type screws and appropriate retention seals that ensure proper anchoring. Inclusive of LED circuit, OPTI BEAM aluminium reflector and black plastic cover. The product is wired using an A2 stainless steel cable gland, with type-H07RNF 2x1 mm² outgoing power cable (L=1191 mm). The cable is equipped with an anti-transpiration device (IP68) consisting of a silicone seal placed on the power cable and housed inside the product. The outer casing for installation can be ordered separately from the plastic optical assembly. The assembly made up of the frame, optical assembly and outer casing guarantees 5000 kg resistance to static loads. Maximum glass surface temperature is lower than 40°C.

Installation

The product is secured to the outer casing by means of two TORX-type screws. The luminaire can be installed recessed, floor-standing, using an outer casing.



Colour
Steel (13)

Weight (Kg)
1.65


Mounting
Floor recessed|ground recessed

Wiring
Product inclusive of 220-240 VAC electronic control gear

Notes

IP68 protection rating for both the product and the power cable using IP68 connectors * The product is not deemed suitable for installation in pools and fountains. Overvoltage protection: 2KV Common mode, 1KV differenzial mode

Complies with EN60598-1 and pertinent regulations

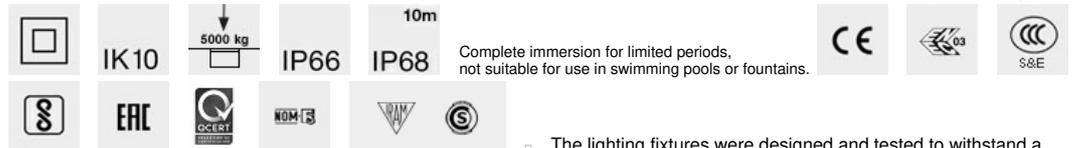

Complete immersion for limited periods, not suitable for use in swimming pools or fountains.

The lighting fixtures were designed and tested to withstand a static load of up to 50000 N and to resist drive-over stress by vehicles with tires. The fixtures cannot be used in lanes subjected to horizontal stresses due to acceleration, braking and / or changes of direction.

Accessory code

X486.04: Outer casing in plastic for the ground, floor with stainless steel ring + closure cap - Black



Technical description

Made of plastic (polypropylene), with stainless steel ring. Inclusive of front cap with system for extracting the cables and double cable entry.

Installation


Floor-standing (concrete)

Colour
Steel (13)

Weight (Kg)
0.9

Mounting
ground surface|Floor recessed|ground recessed


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	1369	MacAdam Step:	2
W system:	11.7	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	1630	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	9.8	Lamp code:	LED
Luminous efficiency (Im/W, real value):	117	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	1369	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	84	Intervallo temperatura ambiente:	from -30°C to 50°C.
Beam angle [°]:	32°	Power factor:	See installation instructions
CRI (minimum):	80	Overvoltage protection:	2kV Common mode & 1kV Differential mode
Colour temperature [K]:	3000		

Polar

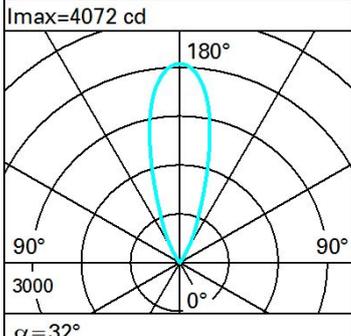Imax=4072 cd 	Lux			
	h	d	Em	E _{max}
	4	2.3	203	254
	8	4.6	51	64
	12	6.9	23	28
	16	9.2	13	16