

Last information update: March 2019



with specular metallic optics and electronic control gear - 2 x 26W/32W/42W TC-DEL/TC-TEL
Attention! Code no longer in production

Product code
 6283

Technical description

Recessed luminaire for compact fluorescent lamps. Made of self-extinguishing thermoplastic material, specular metallised scratch-resistant reflecting surface. Shaped painted sheet-steel heat dissipator. The steel wire springs guarantee rapid efficient installation in all types of false ceilings. The electronic control gear integrated in the remote box connected to the main body includes the multiwatt ballast for two 26, 32 or 42W lamps. Centring device for optimisation of the lamp luminous emission.

Installation

Universal installation on false ceilings ranging from 1 to 25 mm in cross section. Hole in false ceiling Ø 250 mm

Dimension (mm)
 Ø270x100

Colour
 White/Aluminium (39)


Weight (Kg)
 1.2

Mounting
 ceiling recessed

Wiring

Electronic control gear contained in box integrated into the luminaire.

Complies with EN60598-1 and pertinent regulations

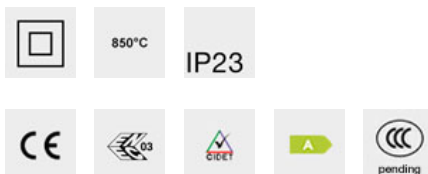

Product configuration: 6283+1652

Compact fluorescent lamp 42W GX24q-4 3000 K (Osram)