



Last information update: February 2025

**Product configuration: QL39**

QL39: Minimal section 5 LEDs - Wall Washer

**Product code**

QL39: Minimal section 5 LEDs - Wall Washer

**Technical description**

Linear recessed miniaturised luminaire for LED lamps, specialised for vertical wall lighting. The patented optic system guarantees a homogeneous and effective emission on the wall, as well as avoiding shadow zones near the ceiling. Main body with die-cast aluminium radiant surface, minimal (frameless) version for mounting flush with the ceiling. For recessed installation in a false ceiling a specific adapter is required that is available with a separate item code. Flux enhancer - superpure aluminium reflector - asymmetrical textured PMMA screen - black polycarbonate internal perimeter frame. Supplied with a dimmable DALI power supply unit connected to the luminaire. High colour rendering LED.

**Installation**

The recess body is inserted in the specific adapter installed previously by means of a steel wire spring - check the thickness of the false ceiling and use a compatible frame available with a separate item code.

**Colour**

Black (04)

**Weight (Kg)**

0.28

**Mounting**

wall recessed|ceiling recessed

**Wiring**


on power supply box: screw connections.

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	331	CRI (typical):	97
W system:	12.8	Colour temperature [K]:	2700
lm source:	850	MacAdam Step:	3
W source:	10	Life Time LED 1:	50,000h - L90 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	25.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	39	Number of optical assemblies:	1
CRI (minimum):	95	Control:	DALI-2

Polar

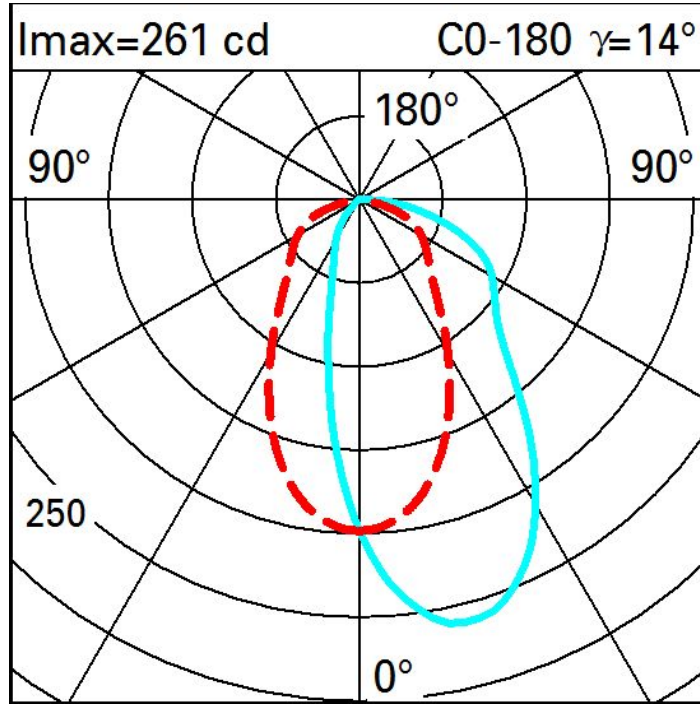

Illuminances

Lux      Wall distance = 1m

3											
	0.8	2	5	13	36	61	36	13	5	2	0.8
2	2	3	7	15	31	44	31	15	7	3	2
	2	3	6	13	25	33	25	13	6	3	2
1	2	3	6	11	18	22	18	11	6	3	2
	2	3	5	8	12	13	12	8	5	3	2
0											
	m	-2	-1	0	1	2	3				