

Last information update: May 2024

Product configuration: P008
P008: small body - warm white - wall washer optic



Product code
P008: small body - warm white - wall washer optic **Attention! Code no longer in production**

Technical description
Adjustable spotlight with adapter for installation on electrified track for a linear PCB LED lamp with a Warm White (3000K) tone. Product complete with super pure anodized aluminium reflector to guarantee wall washer light distribution for vertical downlight wall illumination. Electronic ballast integrated in the body. Die-cast aluminium optical assembly. Rotates 360° about the vertical axis and tilts 90° relative to the horizontal plane. Passive heat dissipation. Option of installing an accessory asymmetric screen.


Installation
On an electrified track or base

Colour	Weight (Kg)
Black (04) Black / White (47)	0.9

Mounting
three circuit track|ceiling surface


Wiring
Product complete with electronic components

Complies with EN60598-1 and pertinent regulations



Technical data			
Im system:	1295	CRI (minimum):	80
W system:	19.6	Colour temperature [K]:	3000
Im source:	1850	MacAdam Step:	2
W source:	17	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	66.1	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	70	Number of optical assemblies:	1

Polar

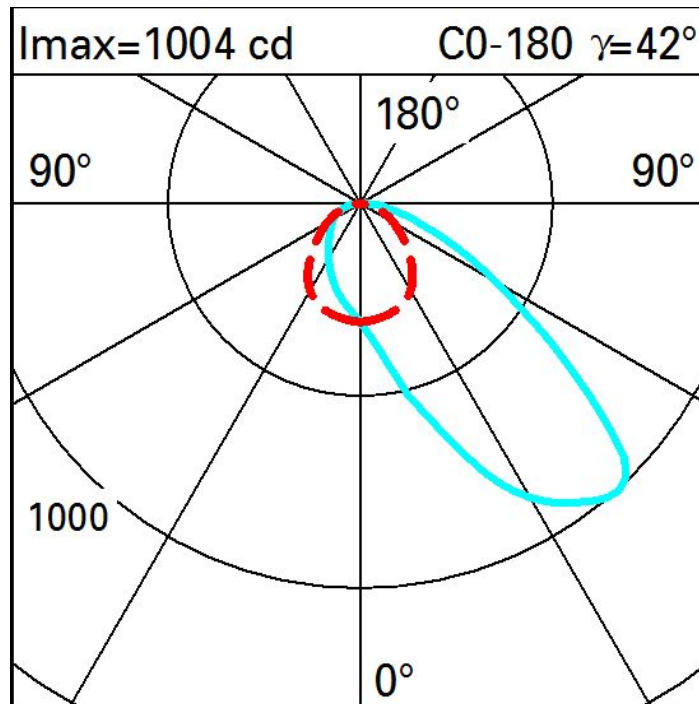

Illuminances

Lux													Wall distance = 1m	
3														
	2	5	14	45	125	199	125	45	14	5	2			
2	4	9	28	89	240	349	240	89	28	9	4			
	6	13	32	75	139	175	139	75	32	13	6			
1	6	13	26	47	69	78	69	47	26	13	6			
	6	11	18	27	35	37	35	27	18	11	6			
0														
	m	-2	-1		0		1		2	3				