

Last information update: April 2025

**Product configuration: UD40.15+X754.74**

UD40.15: Pole-mounted system - STCy0.5 optic - Warm White - Zhaga ready - 19.3W 2376lm - 2200K - Grey

X754.74: Adapter required for installation on pole - To be ordered together with optic assembly - for the Alley product - Grey / Black

**Product code**

UD40.15: Pole-mounted system - STCy0.5 optic - Warm White - Zhaga ready - 19.3W 2376lm - 2200K - Grey

**Technical description**

Luminaire with a direct light street optic with a maximum operating ambient temperature of 40°C. The optical assembly is made of EN1706AC 46100LF aluminium alloy, subjected to a multi-step, pre-treatment process in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a textured acrylic paint, cured at 150°C, with a high level of weather and UV ray resistance. The 5 mm thick, sodium-calcium closing glass for the optical assembly is fitted to the product via 4 screws. The metal component assembly is closed with 5 screws. The power supply includes an automatic internal temperature control system. The product is fitted with a multi-pole Zhaga 4 PIN socket, including an IP65 cap. The product is supplied with a Warm White monochrome LED circuit. The component and optic assemblies can be opened using everyday tools (an option with tool-free opening screws is available on request). The light flow emitted in the upper hemisphere of the system in the horizontal position is null. The product is pre-wired with a 6m long outlet cable. All external screws are made of stainless steel.

**Installation**

The optical assembly can be installed using the pole-top (X754) that can be ordered as an accessory.

**Colour**

Grey (15)

**Weight (Kg)**

4.66

**Mounting**

pole-top

Complies with EN60598-1 and pertinent regulations



IK08



IP66



CE



RoHS



S



QCERT

PEP  
ECO  
PASS  
PORTZD1<sup>4</sup>**Accessory code**

X754.74: Adapter required for installation on pole - To be ordered together with optic assembly - for the Alley product - Grey / Black

**Technical description**

Liquid painted die-cast accessory required for pole-mounted installation of the Alley product. The screws used are made of stainless steel.

**Colour**

Grey / Black (74)

**Weight (Kg)**


3.57

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	2376	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W system:	19.3	Lamp code:	LED
Im source:	-	Number of lamps for optical assembly:	1
W source:	-	ZVEI Code:	LED
Luminous efficiency (lm/W, real value):	123.1	Number of optical assemblies:	1
Im in emergency mode:	-	Intervallo temperatura ambiente:	from -15°C to 40°C.
Total light flux at or above an angle of 90° [Lm]:	4	Power factor:	See installation instructions
Light Output Ratio (L.O.R.) [%]:	100	Inrush current:	20.3 A / 346 µs
CRI (minimum):	70	Maximum number of luminaires of this type per miniature circuit breaker:	B10A: 10 luminaires B16A: 17 luminaires C10A: 17 luminaires C16A: 28 luminaires
Colour temperature [K]:	2200	Minimum dimming %:	1
MacAdam Step:	3	Overvoltage protection:	12kV Common mode & 12kV Differential mode
Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)		

# Polar

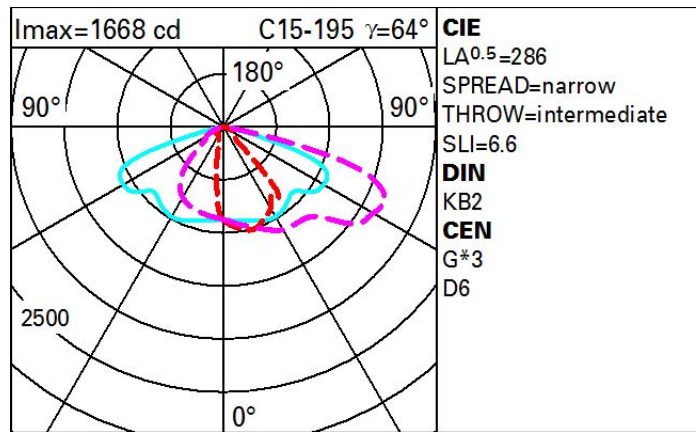

# Isolux

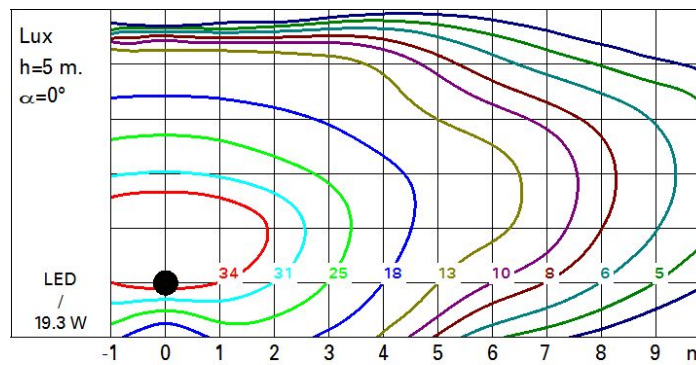

# Utilisation factors

