


Last information update: May 2024

Product configuration: E817

E817: Pole-mounted system street optic.

**Product code**E817: Pole-mounted system street optic. **Attention! Code no longer in production****Technical description**

Outdoor luminaire with a street optic (ST0.5), designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather and UV ray resistance. Diffusor made of shockproof, UV-stabilised injection moulded polycarbonate. Complete with circuit having Warm White monochrome LEDs and polymer optic multilayer lenses. Changeable driver and LEDs. Electronic selv driver with automatic internal temperature control system. All external screws are made of stainless steel.

Installation

The luminaire can be installed with a pole-top mounting on poles with \varnothing 60mm and 76mm end part using X102 and X126 accessories. Secured to the pole by two bolts.

Colour

Grey (15)

Mounting

pole-top

Wiring

The product is supplied wired and with an outlet cable.

Notes


Overvoltage protection: 6KV Common mode, 7KV differenzial mode

Complies with EN60598-1 and pertinent regulations


**Technical data**

Im system:	1020	MacAdam Step:	5
W system:	10.7	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	-	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	-	Lamp code:	LED
Luminous efficiency (Im/W, real value):	95.3	Number of lamps for optical assembly:	1
Im in emergency mode:	-	ZVEI Code:	LED
Total light flux at or above an angle of 90° [Lm]:	12	Number of optical assemblies:	1
Light Output Ratio (L.O.R.) [%]:	100	Intervalllo temperatura ambiente:	from -20°C to +35°C. (*)
CRI (minimum):	70	Control:	On/off
Colour temperature [K]:	3000		

* Preliminary data

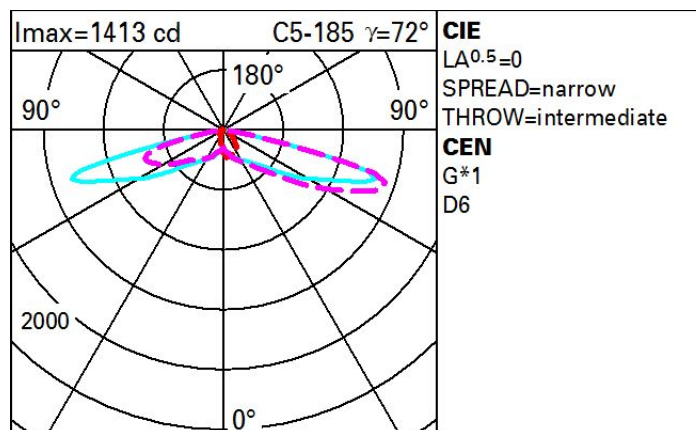Polar

Isolux

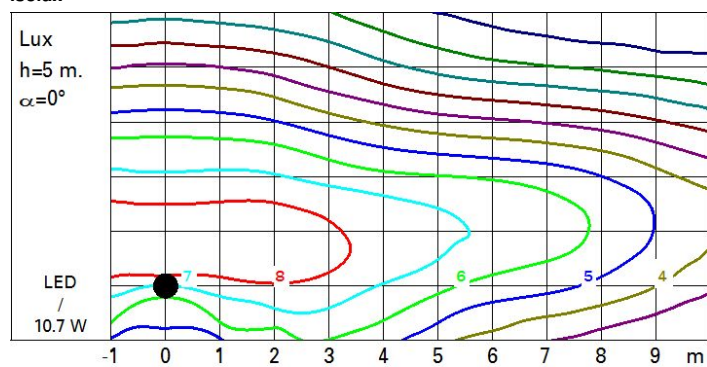

Utilisation factors

