

Archilede HP


Design iGuzzini

iGuzzini

Last information update: May 2024

Product configuration: ED27

ED27: Pole-mounted system – A60 optic – Warm White – Middle of the Night - ø46–60–76mm



Product code

ED27: Pole-mounted system – A60 optic – Warm White – Middle of the Night - ø46–60–76mm **Attention! Code no longer in production**

Technical description

Outdoor luminaire with direct light asymmetric optic for increased visual comfort, designed to use LED lamps. The optical assembly and the pole attachment system are made of EN1706AC 46100LF aluminium alloy and subjected to a multi-step, pre-treatment process, in which the main phases are: degreasing, fluorozirconation (a protective surface film) and sealing (with a nano-structured silane layer). The painting stage consists of a primer and a liquid acrylic paint, cured at 150 °C, with a high level of weather resistance. Option of also adjusting, with a graduated scale, the inclination in relation to the road surface of +15°/-10° (in 5° steps) for a pole-top installation and +5°/20° (in 5° steps) for a lateral installation. 5 mm thick tempered sodium-calcium closure glass. The glass secured to the frame closes the led optical assembly which is secured to the components assembly with a hinge and 2 screws. The high IP rating is guaranteed by the silicone gasket placed between the two elements. Complete with circuit featuring monochrome LEDs and silver aluminium reflectors. LED assembly can be replaced directly on site.

Installation

The floodlight can be installed with pole-top or lateral mounting using a die-cast aluminium pole-top for diameters of 46/60/76 mm. Diameters from 60 to 76 mm without using the standard adaptor, and from 46 to 60 mm with the adaptor. Secured to the pole by two bolts and two safety locking nuts.

Colour

Grey (15)

Weight (Kg)

15.3

Mounting

wall arm/pole-top

Wiring

The pole-top attachment guarantees the completely safe passage of power cables, avoiding piercing. 6-pole terminal board for ø 7-14mm cables. Overvoltage protection: 10KV Common Mode and 6KV Differential Mode


Complies with EN60598-1 and pertinent regulations



Technical data

Im system:	10850	MacAdam Step:	3
W system:	84.6	Life Time LED 1:	100,000h - L90 - B10 (Ta 25°C)
Im source:	-	Life Time LED 2:	100,000h - L90 - B10 (Ta 40°C)
W source:	-	Voltage [Vin]:	230
Luminous efficiency (Im/W, real value):	128.3	Lamp code:	LED
Im in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	100	Number of optical assemblies:	1
CRI (minimum):	70	Intervallo temperatura ambiente:	from -40°C to 50°C.
Colour temperature [K]:	3000	Control:	Middle of the night

Polar

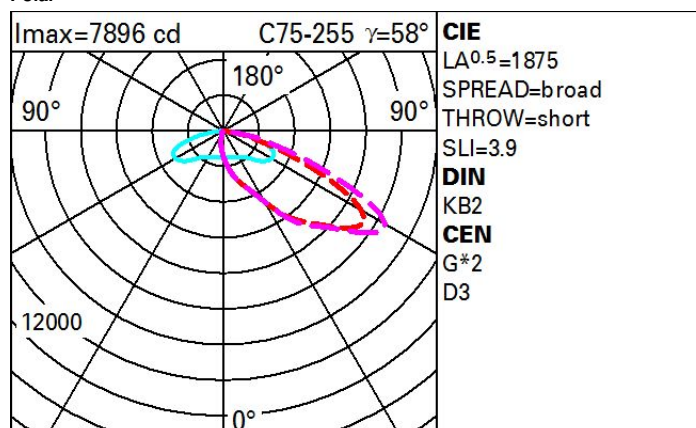

Isolux

