

Last information update: May 2024

Product configuration: Q222

Q222: rectangular recessed luminaire with 3 optical assemblies - warm white passive dissipation LEDs - integrated electronic control gear - medium

**Product code**Q222: rectangular recessed luminaire with 3 optical assemblies - warm white passive dissipation LEDs - integrated electronic control gear - medium **Attention! Code no longer in production****Technical description**

Multiple recessed adjustable removable luminaire for LED lamp with passive heat dissipation system. Sheet steel perimeter frame. Main structure made of die-cast aluminium. Steel rotation hinges. Die-cast aluminium lamp bodies with shaped surface for high level radiant effect for effectively reducing the temperature and keeping the long-term LED lamp performance unchanged. Chrome-plated aluminium lamp body closing rings. Reflectors with high efficiency super-pure aluminium optic - medium beam angle. Bodies adjusted using manually operated device: internal 29° - external 75° - rotation about axis 355°. During adjustment and rotation the lamp bodies are subject to some limitations. Consult the instruction sheet. Supplied with electronic control gear units connected to the luminaire. Warm white high efficiency LED.

Installation

recessed: preparation slot 138 x 386 mm; perimeter frame preliminary fixing on false ceiling (min. thickness 1 mm) with adjustable metal brackets; main structure inserted and mechanically locked on the frame

Colour

White / Aluminium (39) | Grey / Black / Aluminium (E1)

Mounting

ceiling recessed

Wiring

on control gear box with quick-coupling connections; each lamp body has a specific ballast, allowing separate switch ons

Notes

the configuration of the lamp bodies causes some limitations during angling and rotation; consult the instruction leaflet

Complies with EN60598-1 and pertinent regulations

**Technical data**

lm system:	7110	CRI:	80
W system:	76.5	Colour temperature [K]:	3000
lm source:	3000	MacAdam Step:	2
W source:	22	Life Time LED 1:	> 50,000h - L80 - B10 (Ta 25°C)
Luminous efficiency (lm/W, real value):	92.9	Lamp code:	LED
lm in emergency mode:	-	Number of lamps for optical assembly:	1
Total light flux at or above an angle of 90° [Lm]:	0	ZVEI Code:	LED
Light Output Ratio (L.O.R.) [%]:	79	Number of optical assemblies:	3
Beam angle [°]:	22°		


Polar

 $\alpha = 22^\circ$	Imax=7973 cd			
	CIE nL 0.79 95-100-100-100-79 UGR 16.9-16.9			
	DIN A.61			
	UTE 0.79A+0.00T F*1=954 F*1+F*2=997 F*1+F*2+F*3=1000			
	CIBSE LG3 L<1500 cd/m² at 65° UGR<19 L<1500 cd/mq @65°			
	Lux			
	h	d	Em	Emax
	2	0.8	1575	1993
	4	1.6	394	498
	6	2.3	175	221
8	3.1	98	125	

Utilisation factors

R	77	75	73	71	55	53	33	00	DRR
K0.8	70	66	63	61	65	62	62	59	75
1.0	73	70	67	65	69	66	66	63	80
1.5	77	75	72	71	74	72	71	68	87
2.0	80	78	76	75	77	75	74	72	91
2.5	81	80	79	78	79	78	77	75	94
3.0	82	81	80	80	80	79	78	76	96
4.0	84	83	82	81	81	81	80	78	98
5.0	84	83	83	83	82	82	80	78	99

Luminance curve limit

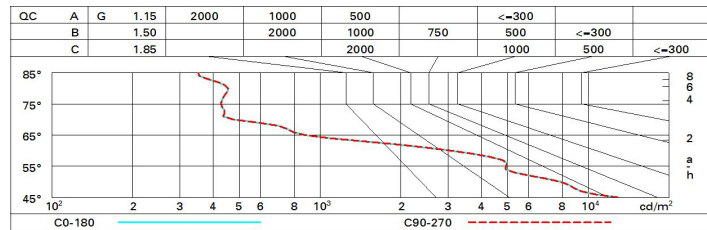

UGR diagram

Corrected UGR values (at 3000 lm bare lamp luminous flux)											
Reflect.: ceiling walls work pl. Room dim x y		viewed crosswise					viewed endwise				
		0.70	0.70	0.50	0.50	0.30	0.70	0.70	0.50	0.50	0.30
		0.50	0.30	0.50	0.30	0.30	0.50	0.30	0.50	0.30	0.30
		0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
2H	2H	17.7	19.3	18.0	19.6	19.9	17.7	19.3	18.0	19.6	19.9
	3H	17.6	18.8	17.9	19.1	19.4	17.6	18.8	17.9	19.1	19.4
	4H	17.5	18.6	17.9	18.9	19.2	17.5	18.6	17.9	18.9	19.3
	6H	17.4	18.5	17.8	18.8	19.2	17.4	18.5	17.8	18.8	19.2
	8H	17.3	18.4	17.7	18.8	19.2	17.3	18.4	17.7	18.8	19.2
	12H	17.3	18.4	17.7	18.7	19.1	17.3	18.4	17.7	18.7	19.1
4H	2H	17.5	18.6	17.9	18.9	19.3	17.5	18.6	17.9	18.9	19.2
	3H	17.3	18.4	17.7	18.7	19.1	17.3	18.4	17.7	18.7	19.1
	4H	17.2	18.2	17.6	18.6	19.0	17.2	18.2	17.6	18.6	19.0
	6H	17.0	18.3	17.4	18.7	19.1	17.0	18.3	17.4	18.7	19.1
	8H	16.9	18.3	17.3	18.7	19.2	16.9	18.3	17.3	18.7	19.2
	12H	16.7	18.3	17.2	18.7	19.2	16.7	18.3	17.2	18.7	19.2
8H	4H	16.9	18.3	17.3	18.7	19.2	16.9	18.3	17.3	18.7	19.2
	6H	16.7	18.1	17.2	18.6	19.1	16.7	18.1	17.2	18.6	19.1
	8H	16.7	17.9	17.2	18.4	18.9	16.7	17.9	17.2	18.4	18.9
	12H	16.8	17.7	17.3	18.2	18.7	16.8	17.7	17.3	18.2	18.7
12H	4H	16.7	18.3	17.2	18.7	19.2	16.7	18.3	17.2	18.7	19.2
	6H	16.7	17.9	17.2	18.4	18.9	16.7	17.9	17.2	18.4	18.9
	8H	16.8	17.7	17.3	18.2	18.7	16.8	17.7	17.3	18.2	18.7
Variations with the observer position at spacing:											
S =	1.0H	4.3 / -9.6					4.3 / -9.6				
	1.5H	7.1 / -15.0					7.1 / -15.0				
	2.0H	9.1 / -18.0					9.1 / -18.0				